
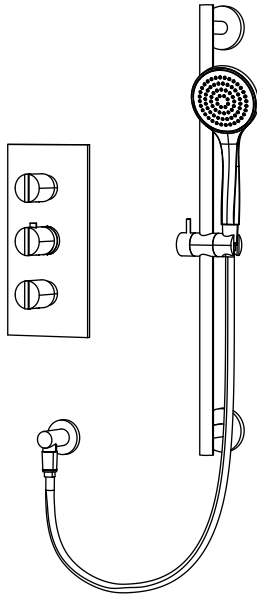


ECH.7200 | Two Output Shower W/ Rain Shower, Hand Shower, & Slide Bar



COMPONENTS

- HH1012SA - 16" Shower Arm
- RHB.10R - 10" Shower Head
- ECH.4500T - Shower Trim
- JVH.4401 - Shower Valve
- HH5100 - Hand Shower
- ORO.5502 - Wall Elbow
- HH.150EM - 1.5m Hose
- ORO.601001A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve w/ stops
- Bottom handle controls handheld.
- Top handle controls shower head
- Middle handle controls temperature
- Shared port operation

SHOWER HEAD:


- Solid brass construction
- 11 LPM flow rate

HAND SHOWER W/ SLIDE BAR & ELBOW:

- Solid Brass construction
- Hand Shower flow rate = 6 LPM
- 1/2" male elbow connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


HH1012SA | Round Shower Arm - 400mm - 16"

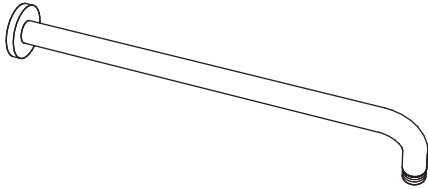


SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

Technical Diagram

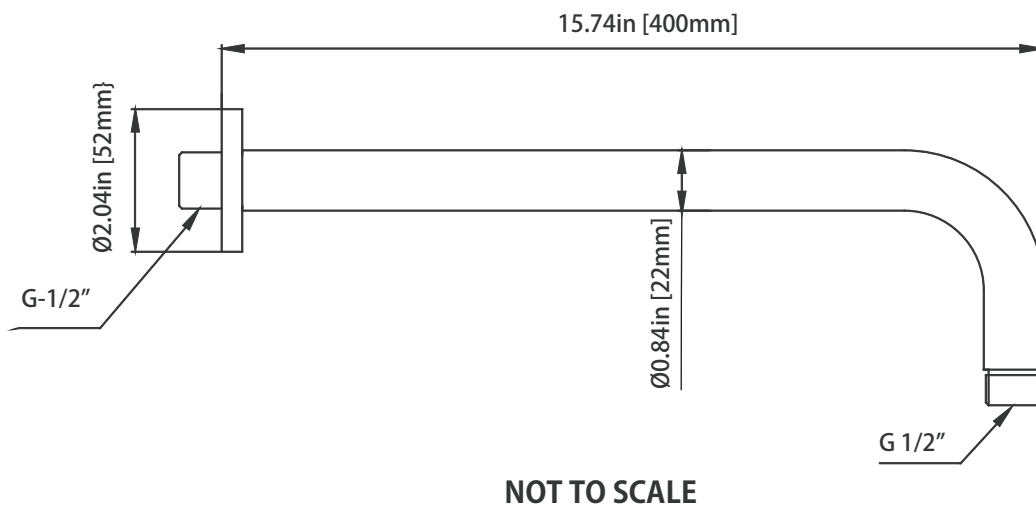


RHB.10R | 10" Round Brass Shower Head

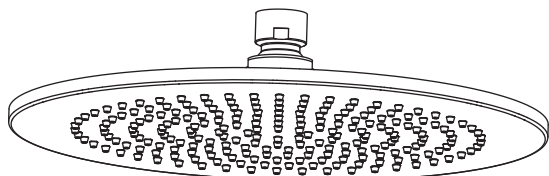


SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 121 Nozzles

Technical Diagram

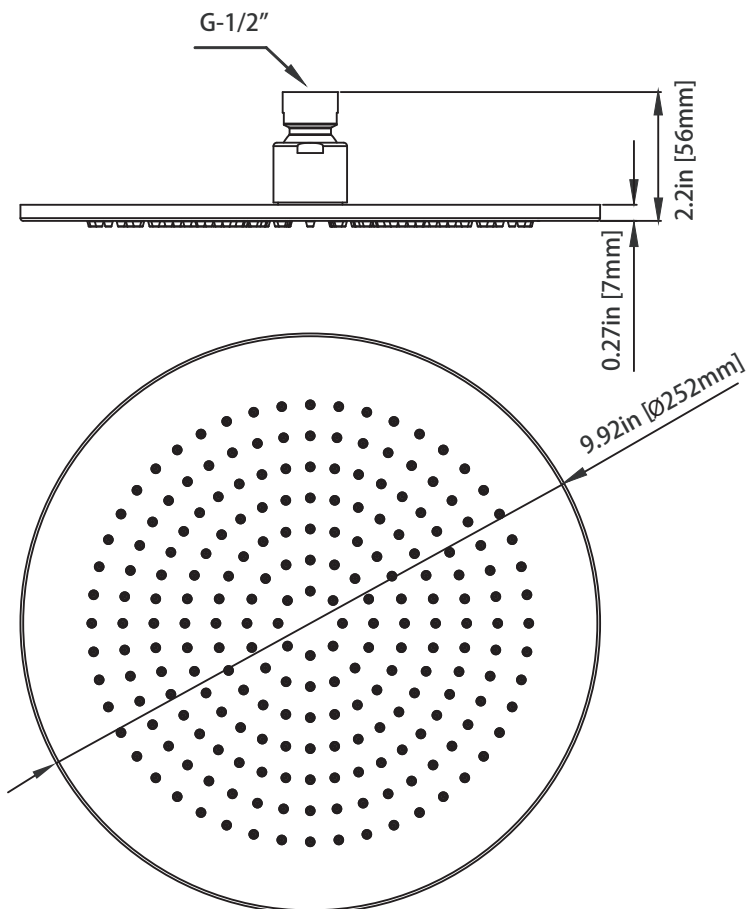


ECH.4500T | Thermostatic Shower Trim



SPECIFICATIONS:

- Solid brass construction
- Valve only - trim not included
- Turn middle knob to control temperature.
- Turn top knob to divert water flow between two top outlets.
- Turn bottom knob to control water flow of bottom outlet.


Technical Diagram

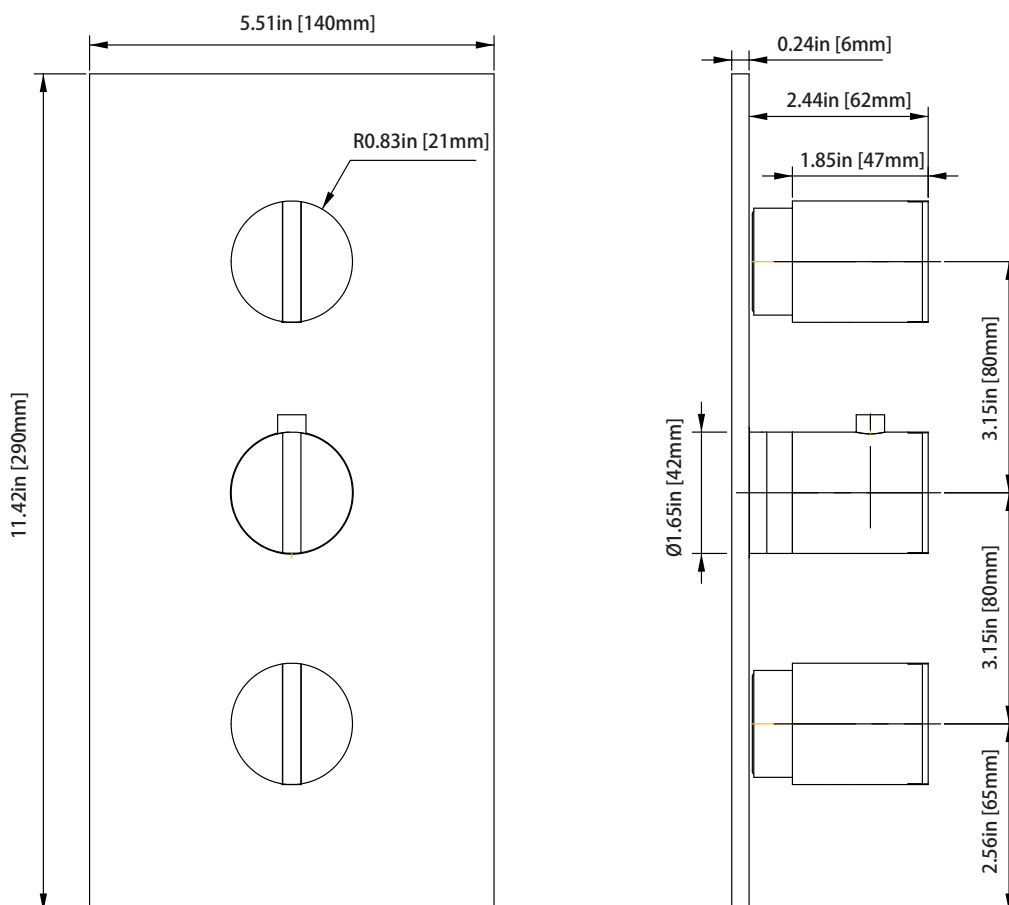


JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4401E**

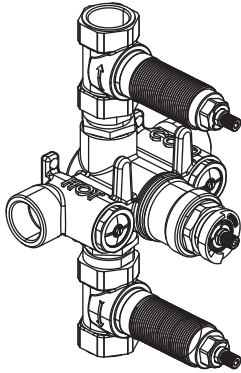


Technical Diagram

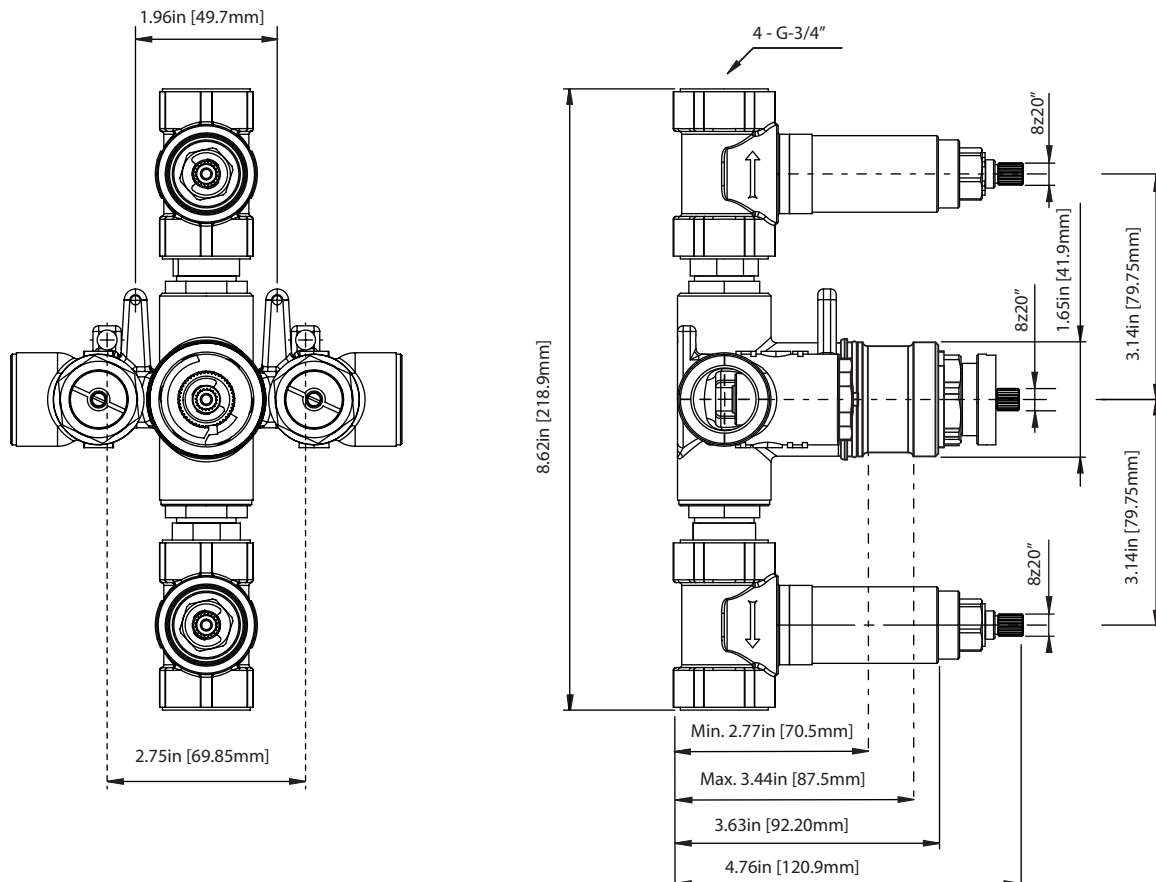


JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

Water Flow Diagram

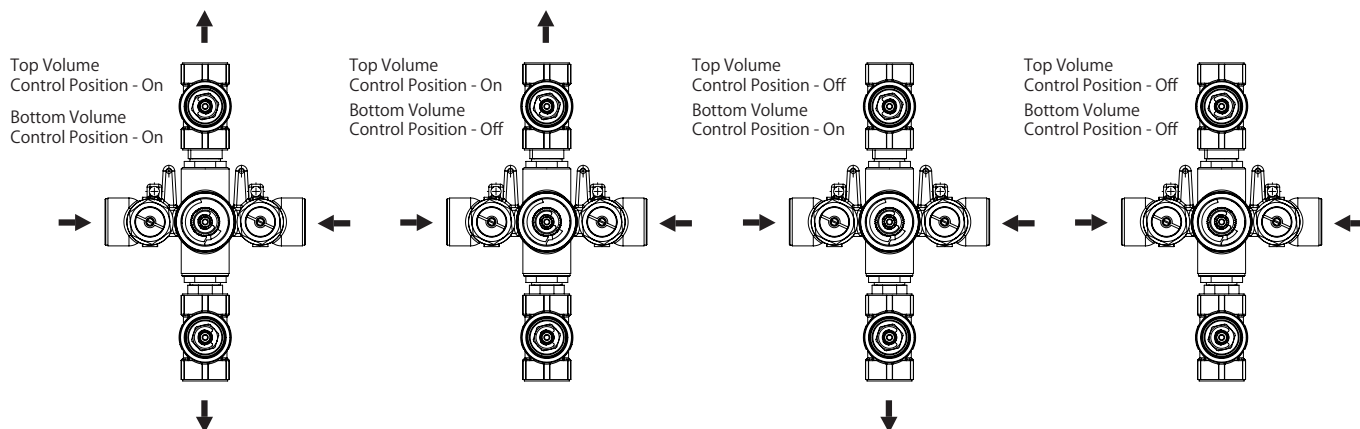


HH5100 | 100mm Single Function Hand-Shower

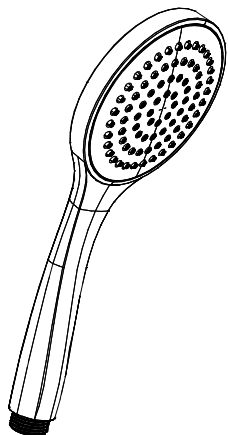

SPECIFICATIONS:

- ABS Construction
- Scrub nozzles to easily clean water sediment
- 6 LPM Flow Rate
- Includes backflow prevention check valve


Technical Diagram

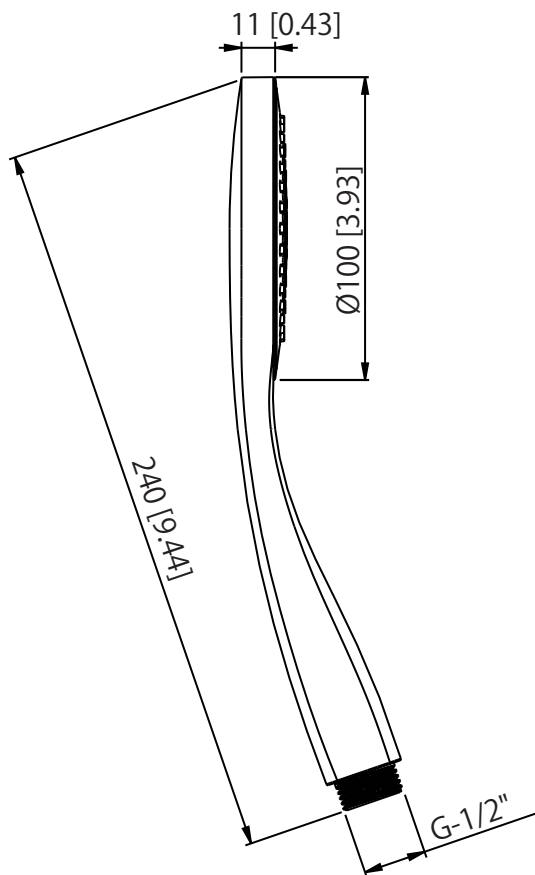




ORO.5502 | Wall Elbow Outlet

SPECIFICATIONS:

- Solid Brass construction
- 1/2" male connection with adjustment
- Includes check valve with back-flow prevention



Technical Diagram

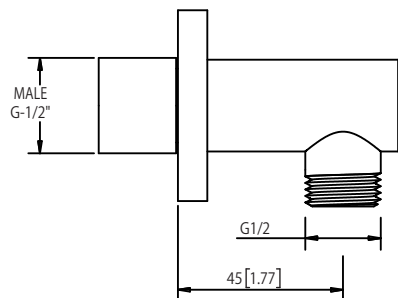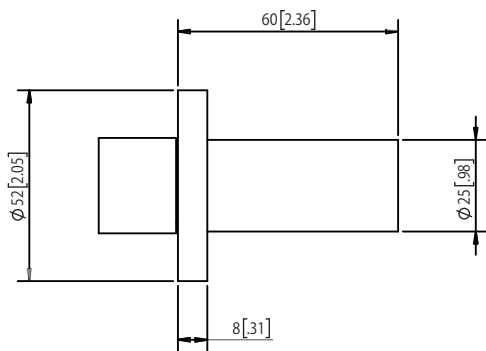


HH.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length


Technical Diagram

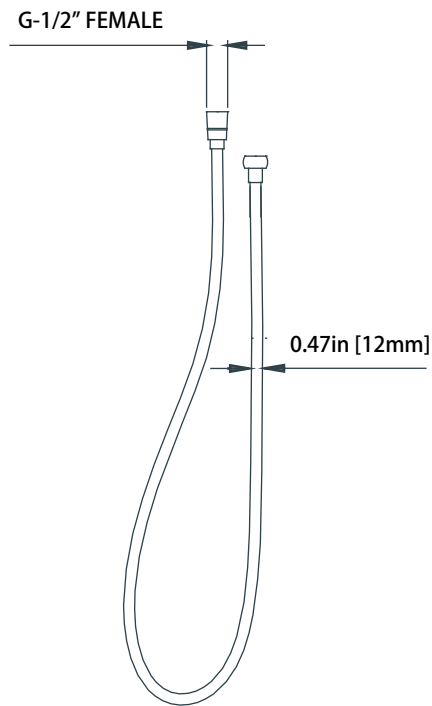

ORO.601001A | Slide Bar

SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation



Technical Diagram

