


## EME.7250 | Two Output Shower W/ Rain Head & Hand Held

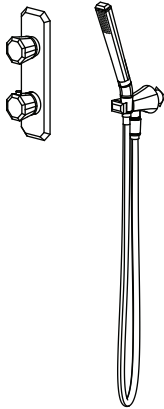

### COMPONENTS

- JHW.7C - 7" Head w/8" Arm
- EME.4000VT - Shower Trim
- JVH.2717F - Shower Valve
- HH1029H - Hand Shower
- EME.8006 - Wall Elbow w/ Holder
- HH.150EM - 1.5m Hose

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:


- Solid brass construction
- 11 LPM flow rate

See individual component specification sheets on following pages for further details.


## JHW.7C | 7" Brass Shower Head With 8" Wall Mounted Shower Arm

### SPECIFICATIONS:


- Solid Brass construction
- With Swivel action
- Shower arm has sliding flange

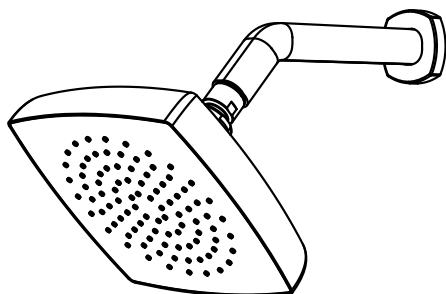

### Technical Diagram

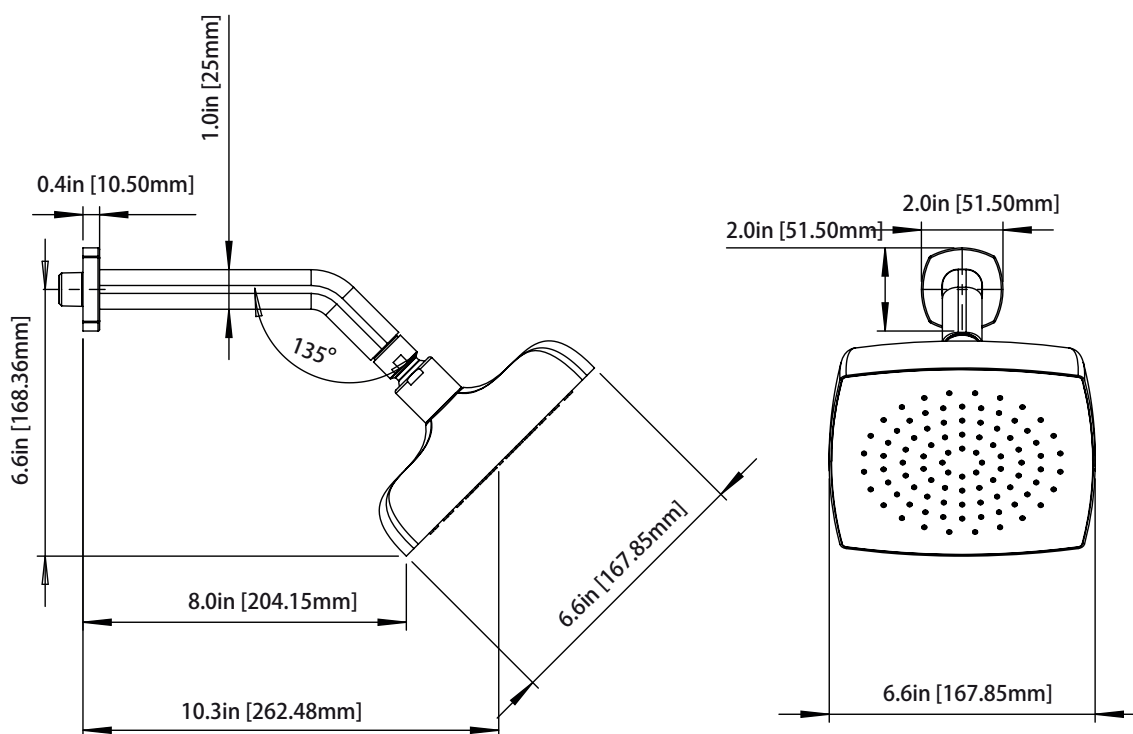


## EME.4000VT | Vertical Thermostatic Shower Trim

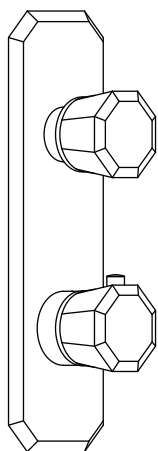


### SPECIFICATIONS:

- Solid Brass Construction
- Trim Only - Valve Not Included
- Turn bottom handle to control temperature
- Turn top handle to control volume

### Technical Diagram

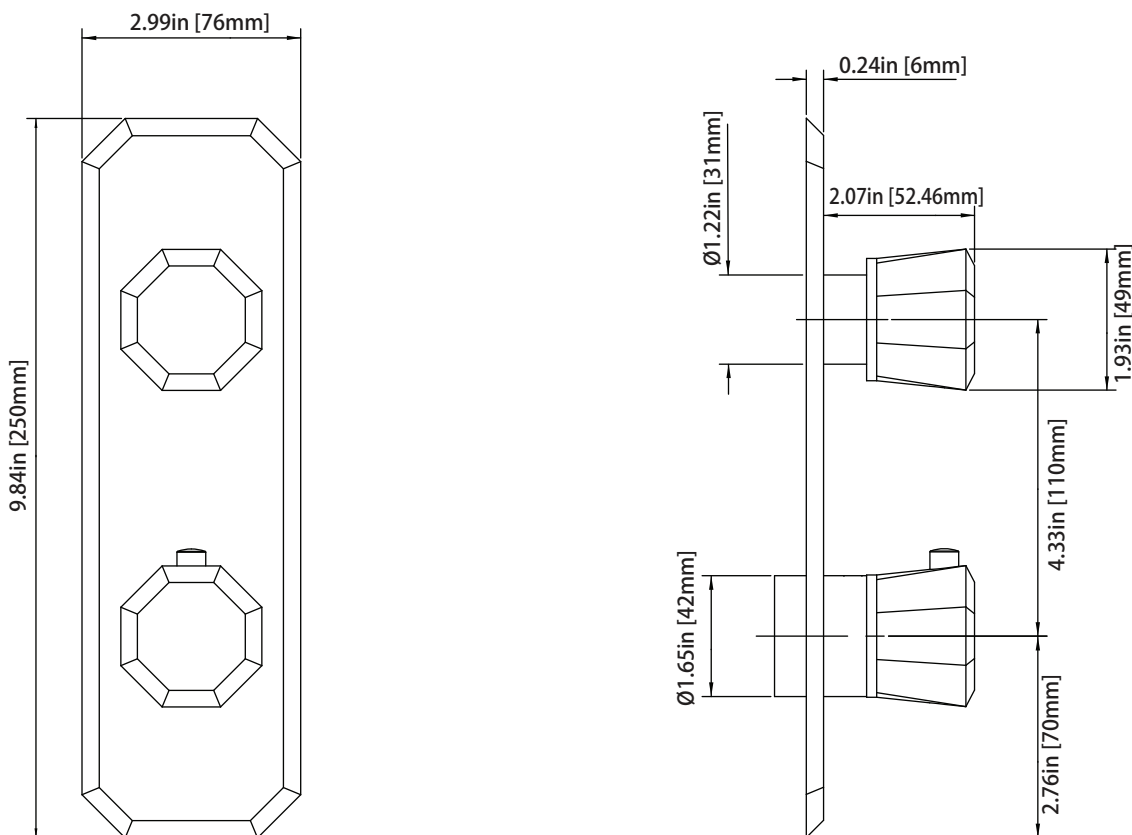

## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output

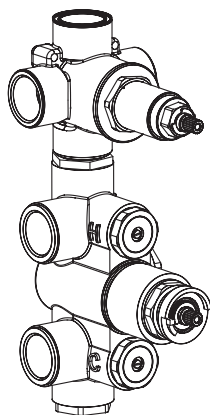


### SPECIFICATIONS:


- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*

**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

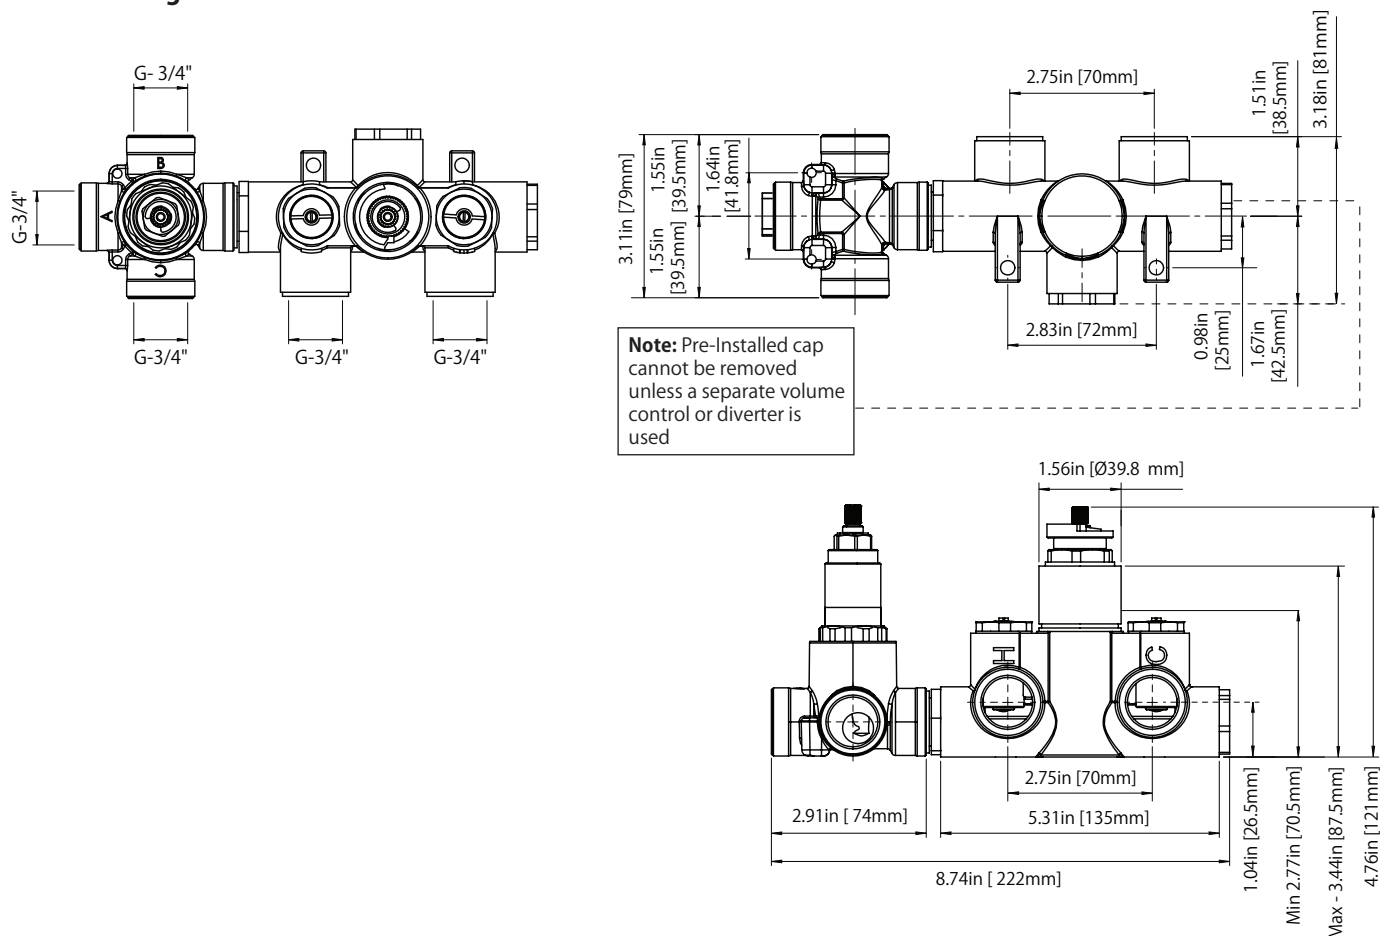


## HH1029H | Solid Brass Hand Shower

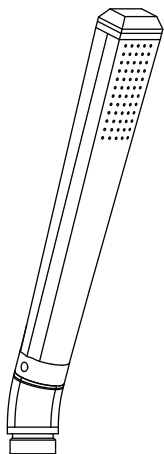

### SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve


### Technical Diagram

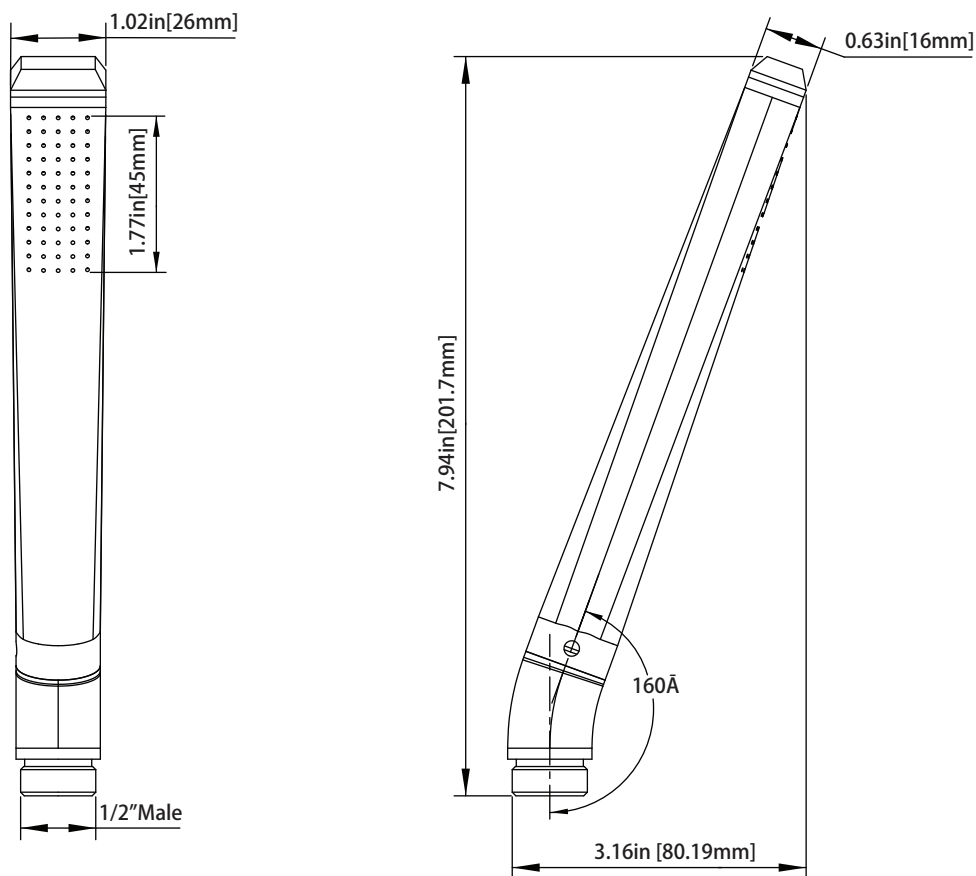




## EME.8006 | Wall Elbow With Holder Combo

### SPECIFICATIONS:

- Solid Brass Construction
- Includes Check Valve with back flow prevention.

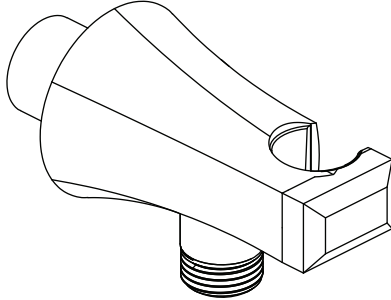

### Technical Diagram

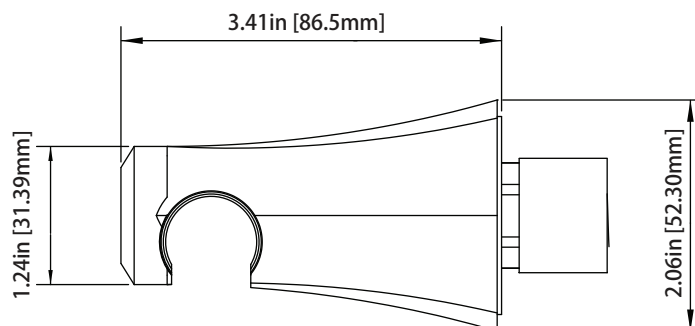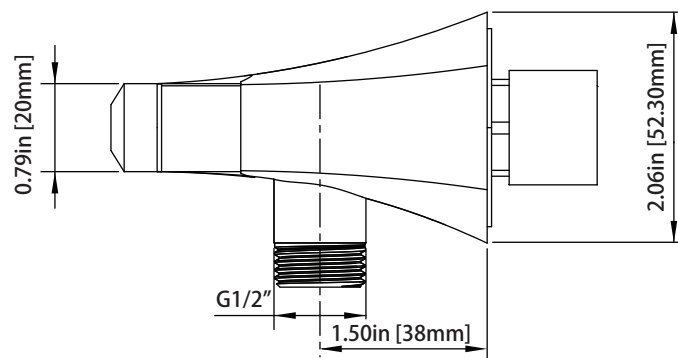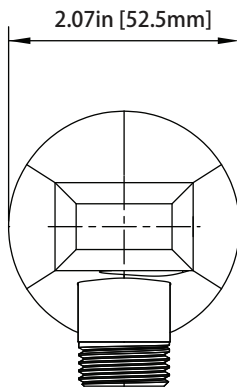

## HH.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

