




## EME.7350 | Two Output Shower W/ Rain Head, Hand Shower & Slide Bar

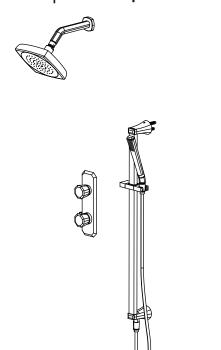

### COMPONENTS

JHW.7C
EME.4000VT
JVH.2717F
HH1029H
EME.601005A
HH.150EM
T" Head w/8" Arm
Shower Trim
Shower Valve
Hand Shower
Slide Bar
1.5m Hose

#### **SHOWER VALVE:**


- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:

- · Solid brass construction
- 11 LPM flow rate


See individual component specification sheets on following pages for further details.

# JHW.7C | 7 " Brass Shower Head With 8" Wall Mounted Shower Arm




### SPECIFICATIONS:

- Solid Brass construction
- With Swivel action
- Shower arm has sliding flange

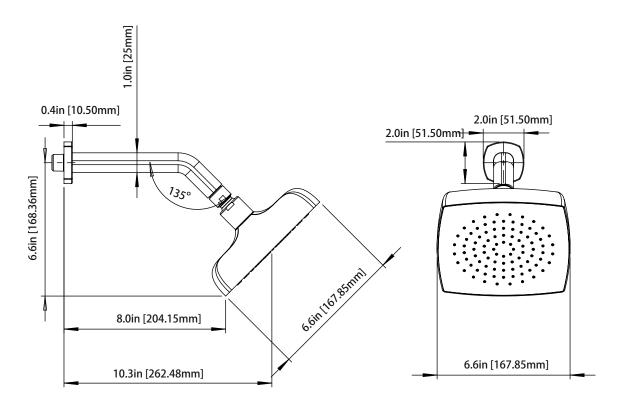



# EME.4000VT | Vertical Thermostatic Shower Trim



### **SPECIFICATIONS:**


- Solid Brass Construction
- Trim Only Valve Not Included
- Turn bottom handle to control temperature
- Turn top handle to control volume

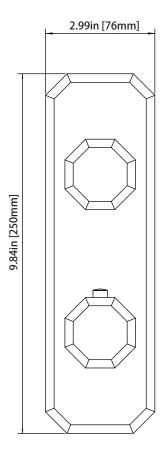

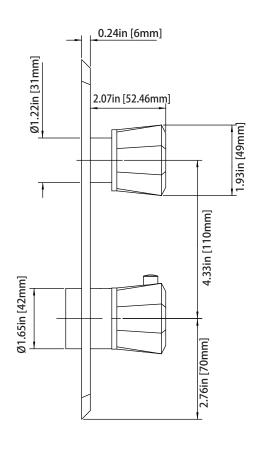




## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output





### **SPECIFICATIONS:**

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4101E\*\*


A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.



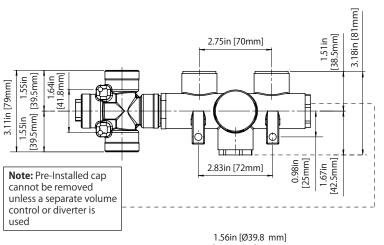





# HH1029H | Solid Brass Hand Shower



### **SPECIFICATIONS:**

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

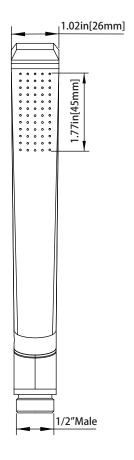

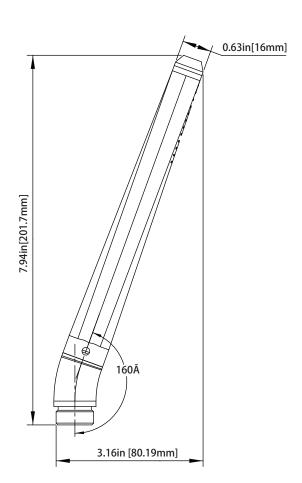


# EME.601005A | Slide Bar With Built in Elbow Outlet



#### SPECIFICATIONS:

- Supply elbow is integrated into slide bar
- With back flow prevention check valveAdjustable slide on installation
- G-1/2" male connection
- Hand held shower height is adjustable

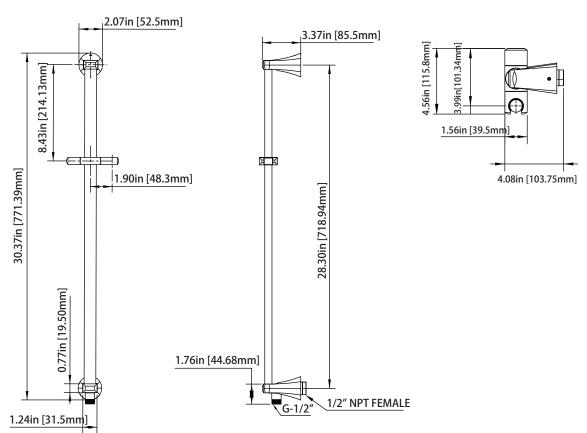

# HH.150EM | Easy Maneuver Hose



### **SPECIFICATIONS:**

- Stainless steel construction
- G-1/2" connection
- 1.5m length

