


JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4101E**



Technical Diagram

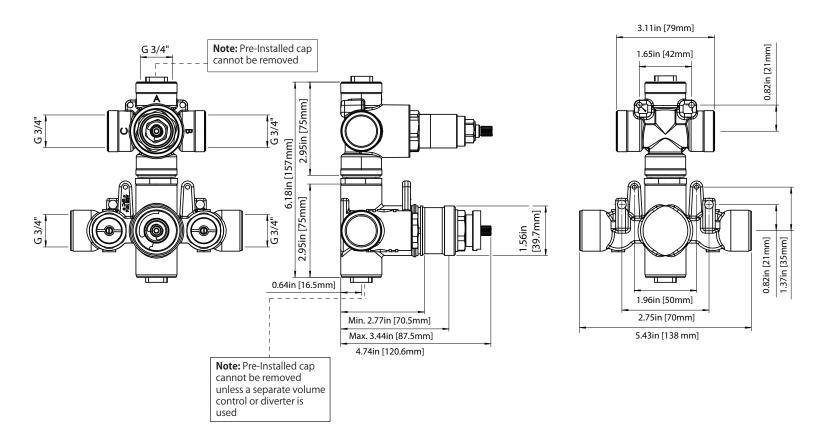



JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

TWO OUPTUT - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.


- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output C Activated

TWO OUPTUT - SHARED PORT OPERATION


Diverter Cartridge # - **15103** (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output B+C Activated
- Position 3 Output C Activated

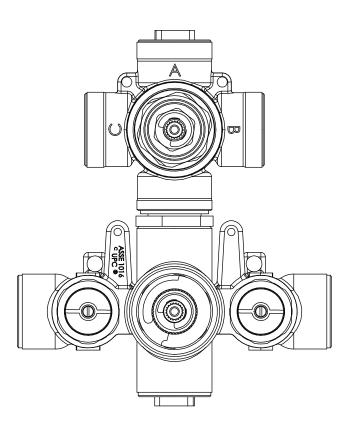

Water Diversion Diagram

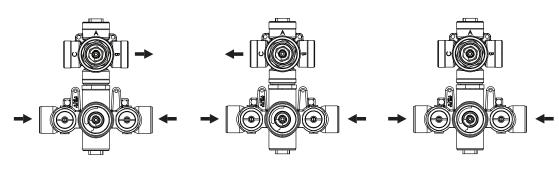

Diverter Position = 1

- Diverter Position = 2
- Diverter Position = off