



ORO.7000 | Single Output Shower Set W/ Rain Shower



COMPONENTS

- HH1012SA - 16" Shower Arm
- HH1002A - 8" Shower Head
- ORO.4000T - Shower Trim
- JVH.4101 - 3/4" Shower Valve

SHOWER VALVE:


- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water volume

SHOWER HEAD:

- Solid brass construction
- 11 GPM flow rate

See individual component specification sheets on following pages for further details.


HH1012SA | Round Shower Arm - 400mm - 16"

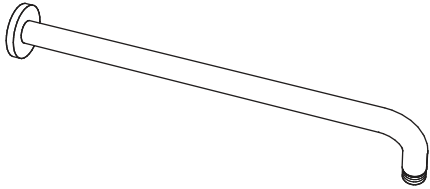

SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange


Technical Diagram

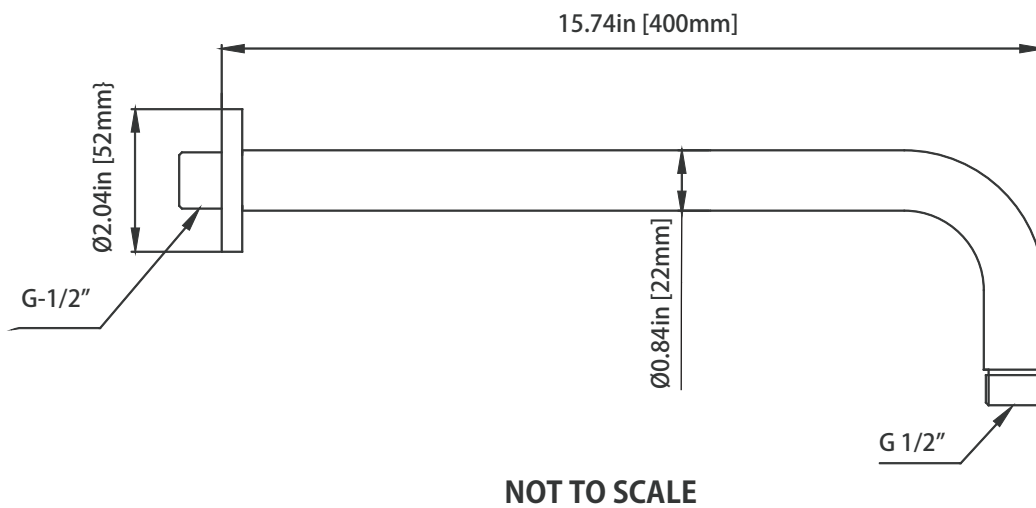


HH1002A | 8" Brass Rain Shower

SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 PM Flow Rate

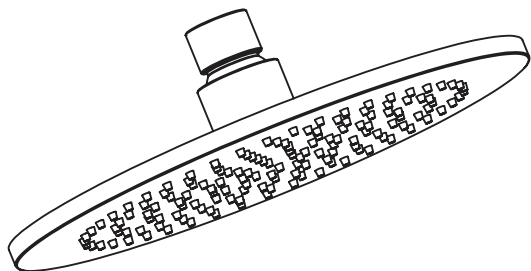

Technical Diagram

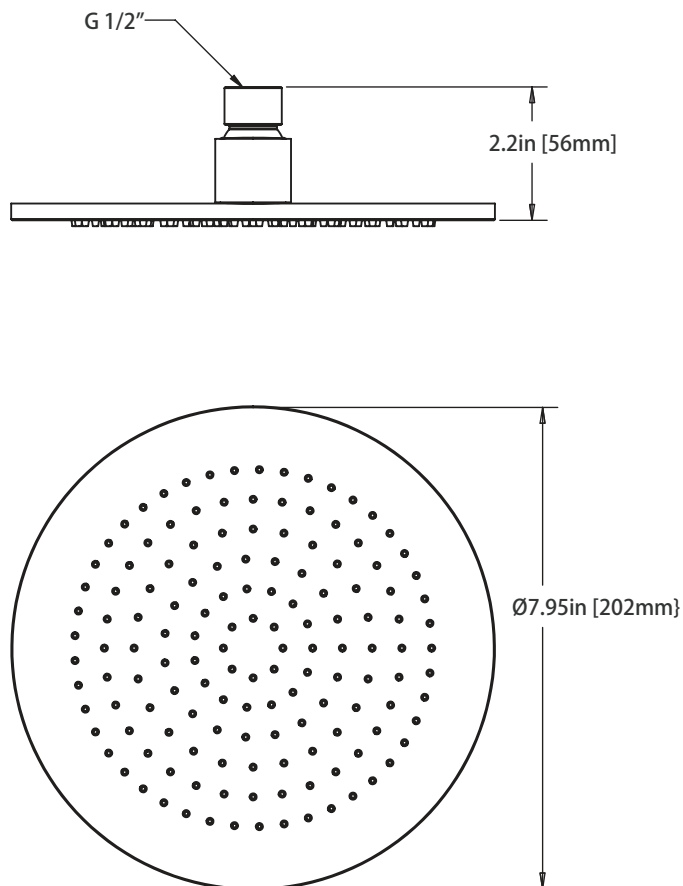


ORO.4000T | Thermostatic Shower Trim

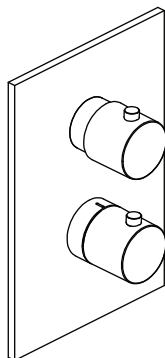

SPECIFICATIONS:

- Solid Brass construction
- Valve not included - trim only
- Turn bottom handle to control temperature.
- Turn top handle to divert water & control volume


Technical Diagram

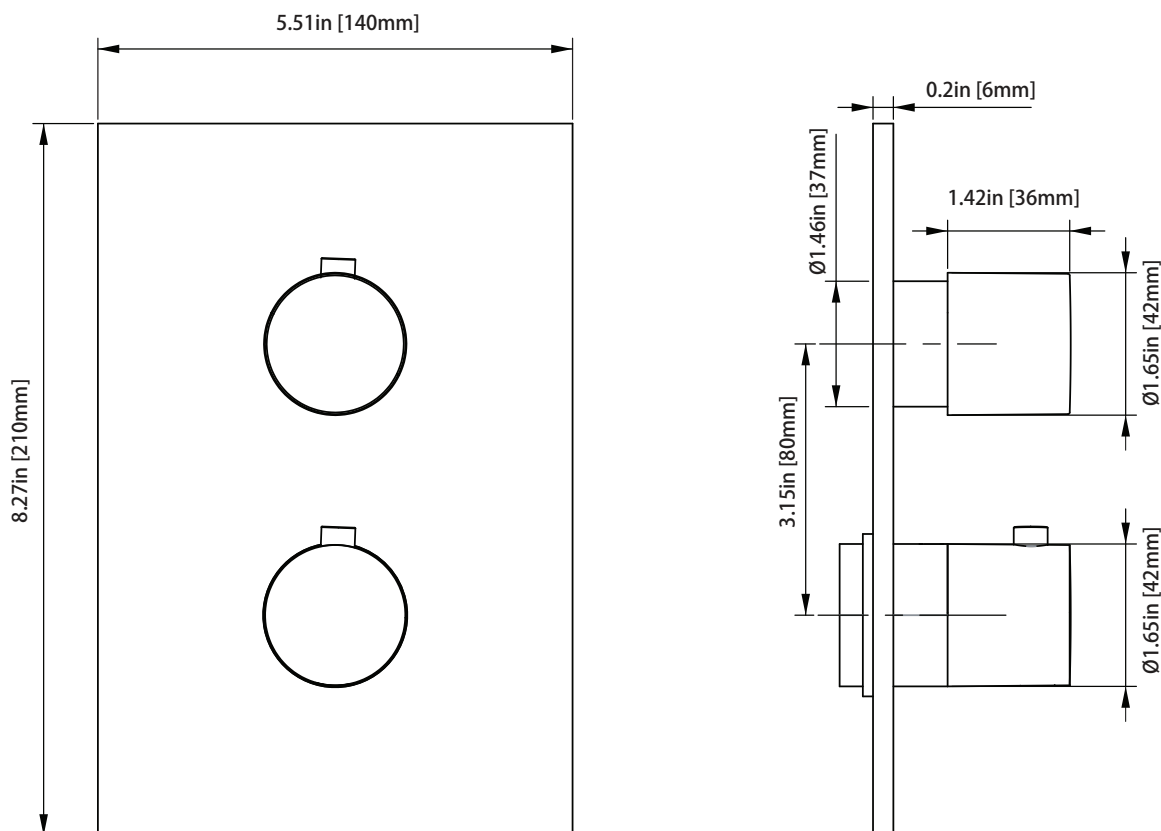


JVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 1 of 2

SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4101E**



Technical Diagram

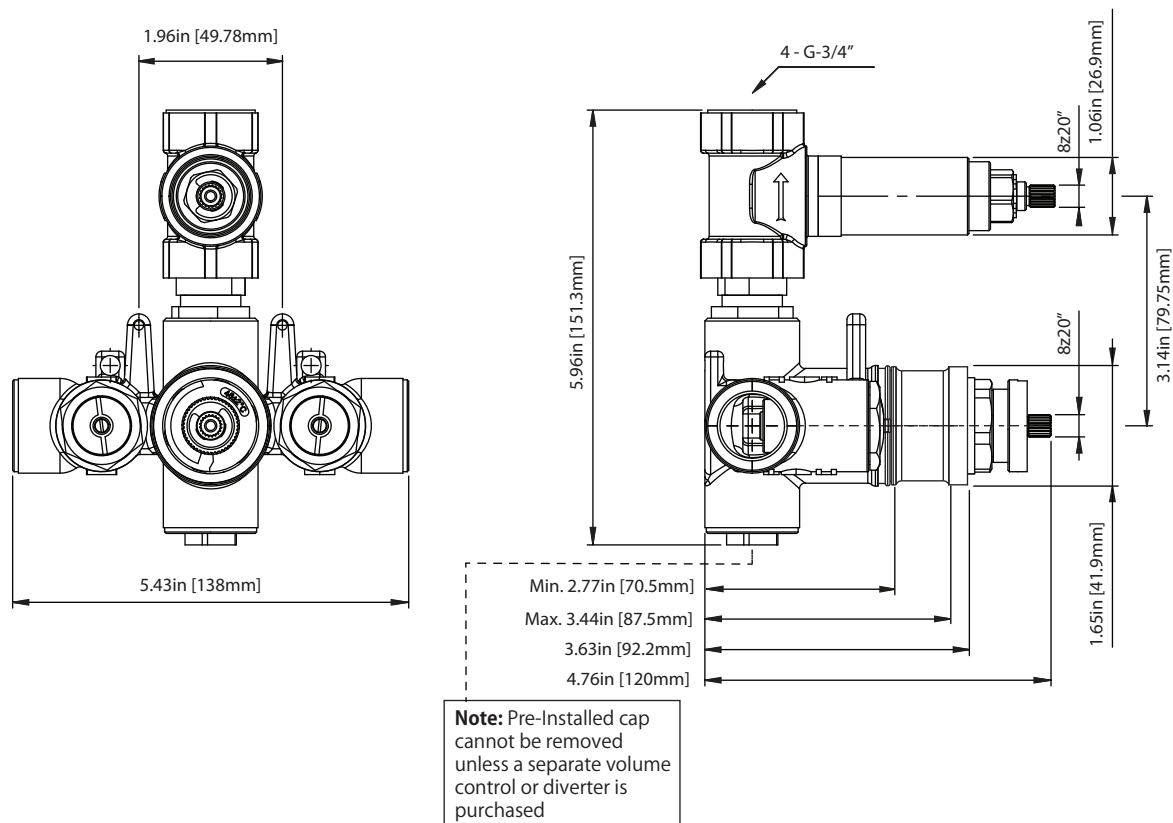

JVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 2 of 2

Water Flow Diagram

