
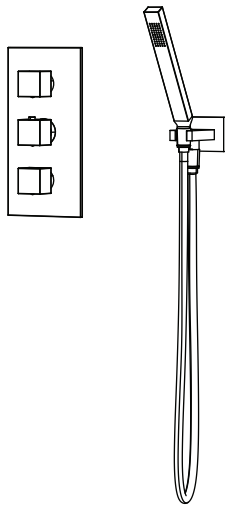


RAR.7150 | Two Output Shower Set W/ Rain Shower & Hand Shower



COMPONENTS

- HH1011SA - 16" Shower Arm
- RHB.10S - 10" Shower Head
- RAR.4500T - Shower Trim
- JVH.4401 - Shower Valve
- HH1006H - Hand Shower
- HH8006 - Wall Elbow w/ Holder
- HH.150EM - 1.5m Hose

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Bottom handle controls handheld.
- Top handle controls shower head
- Middle handle controls temperature
- Shared port operation

SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

HAND SHOWER:


- Solid Brass construction
- 6 LPM flow rate
- 1/2" male connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


HH1011SA | Square Shower Arm - 400mm - 16"

SPECIFICATIONS:


- Solid Brass Shower Arm
- With Sliding Flange

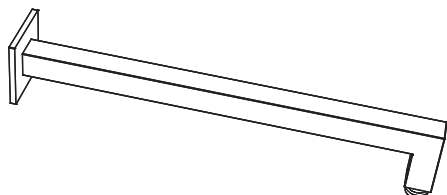

Technical Diagram

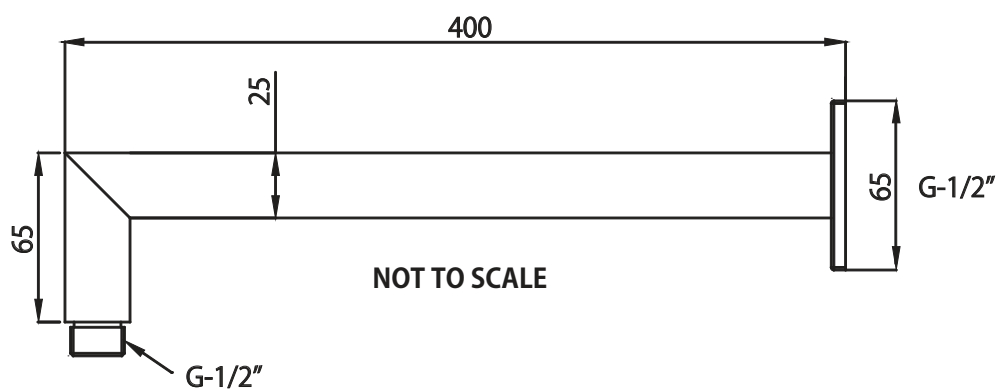


RHB.10S | 10" Brass Shower Head

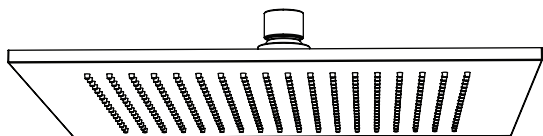


SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 256 Nozzles - [16 x 16]

Technical Diagram

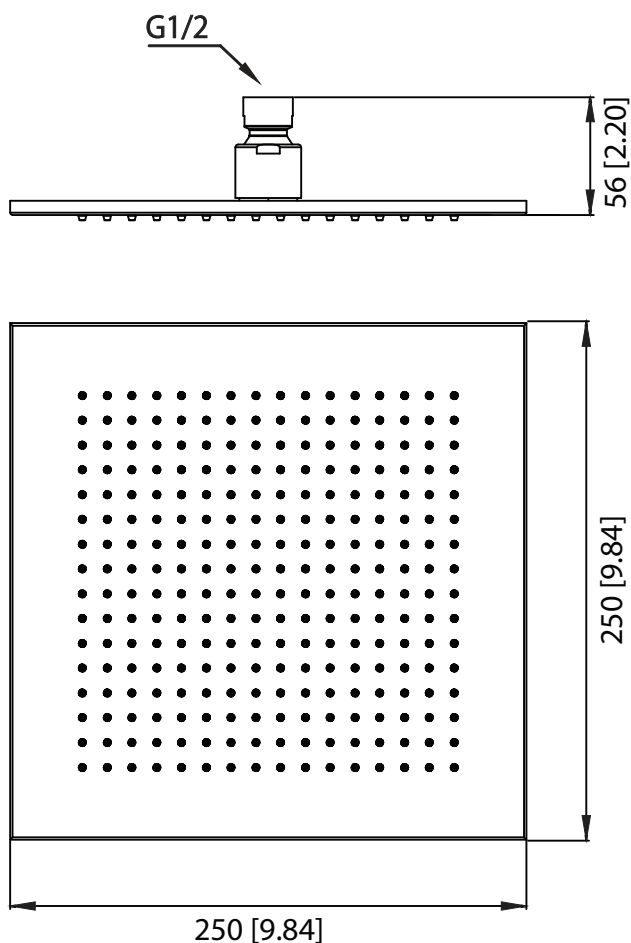


RAR.4500T | Thermostatic Shower Trim




SPECIFICATIONS:

- Solid brass construction
- Valve not included- trim only
- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.

Technical Diagram

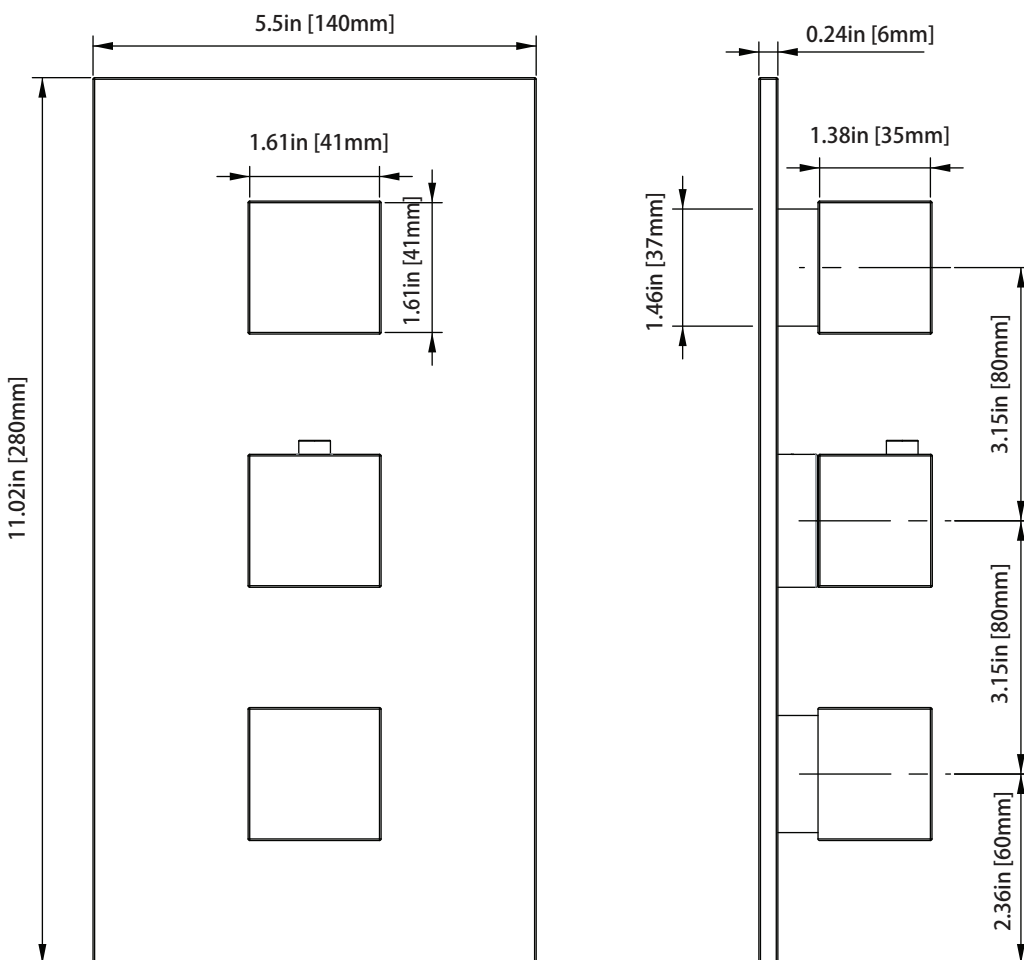


JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

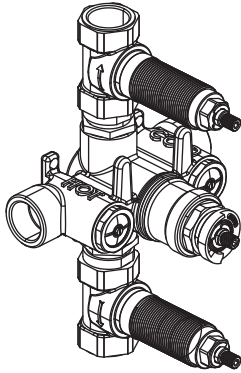

SPECIFICATIONS:


- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4401E**

Technical Diagram

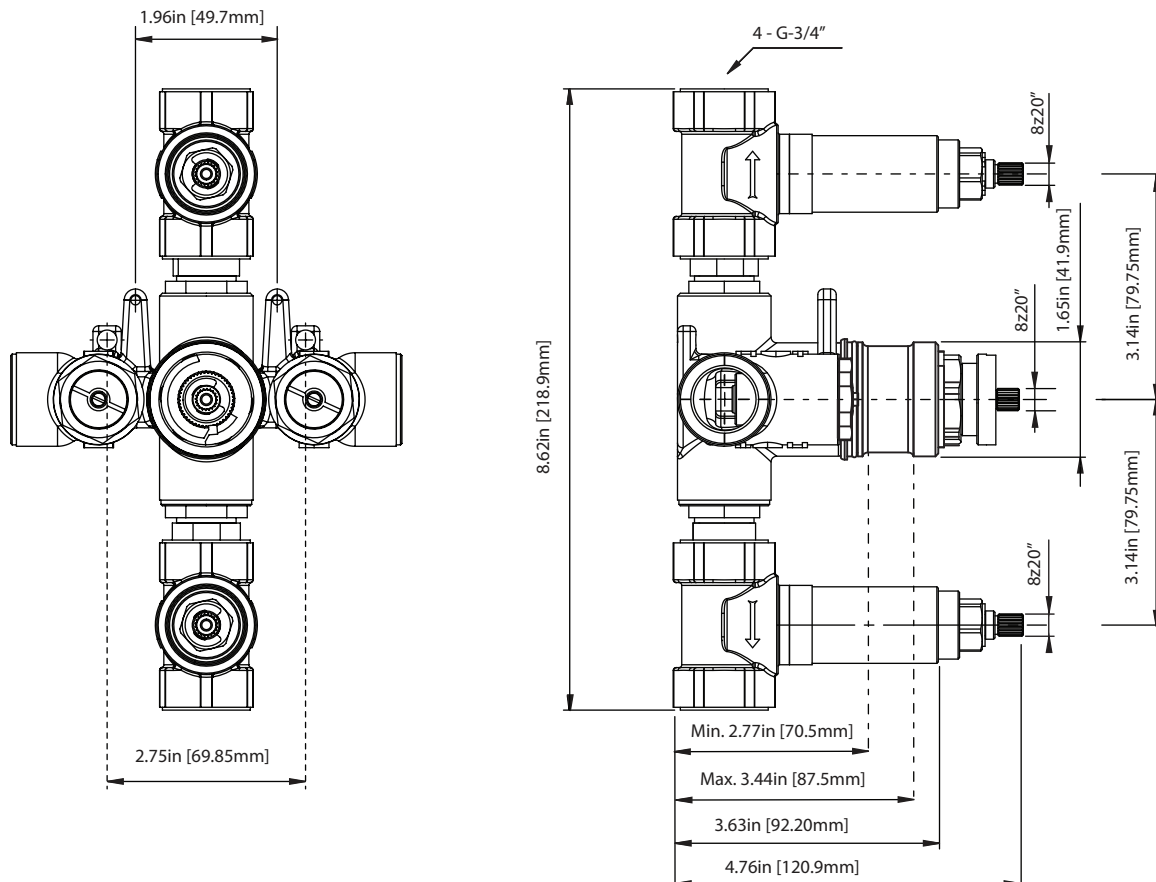

JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2


Water Flow Diagram

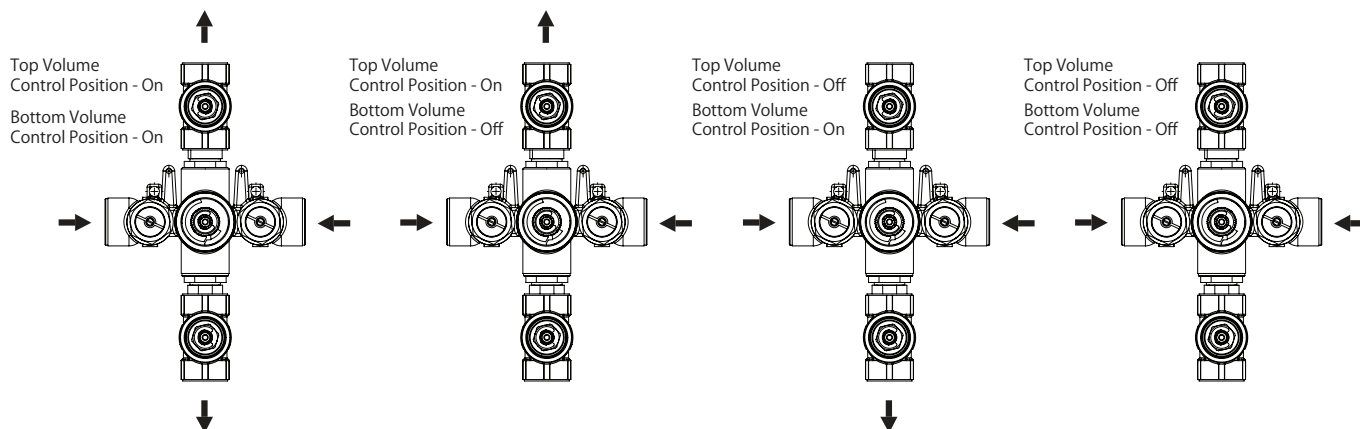


HH1006H | Solid Brass Hand Shower

SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

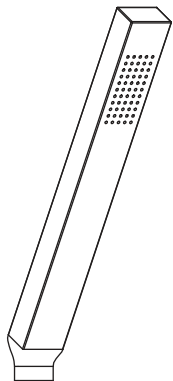


Technical Diagram

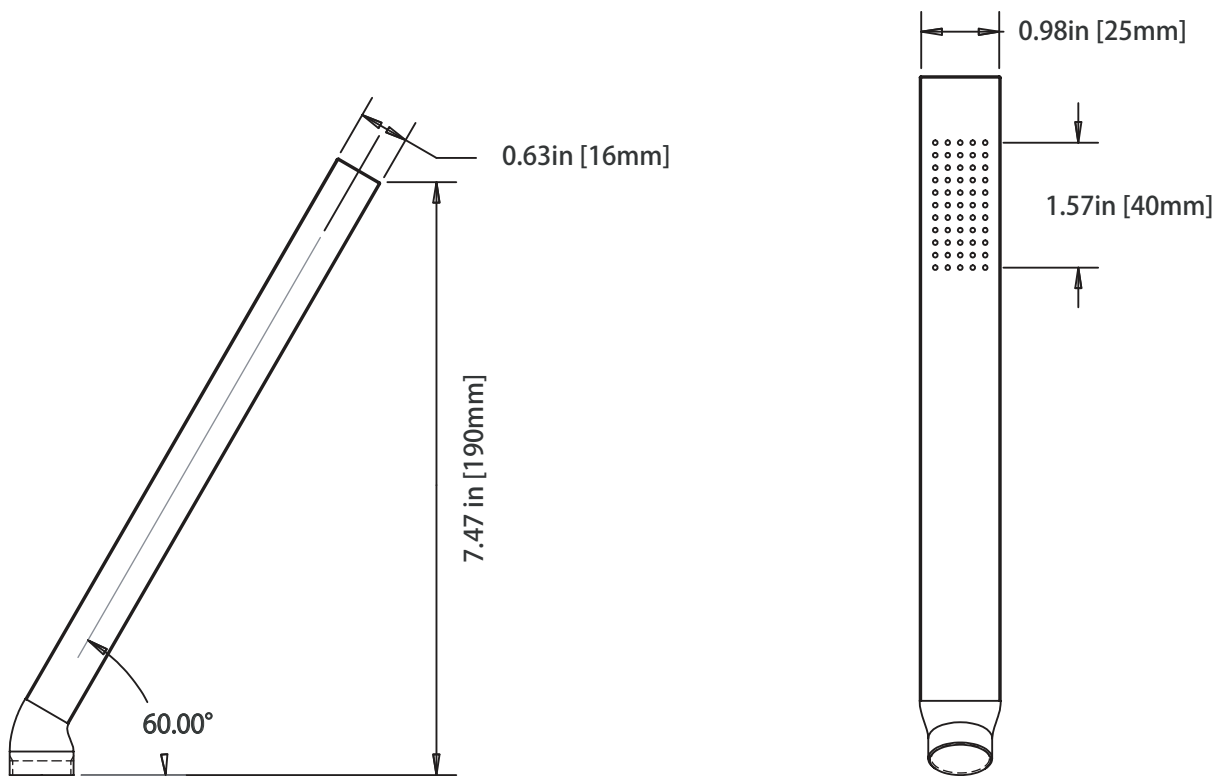


HH8006 | Wall Elbow With Holder Combo

SPECIFICATIONS:

- Solid Brass Construction
- Includes Check Valve with back flow prevention.

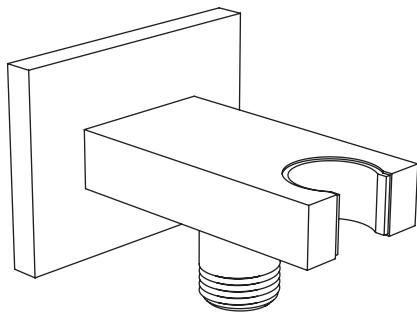

Technical Diagram

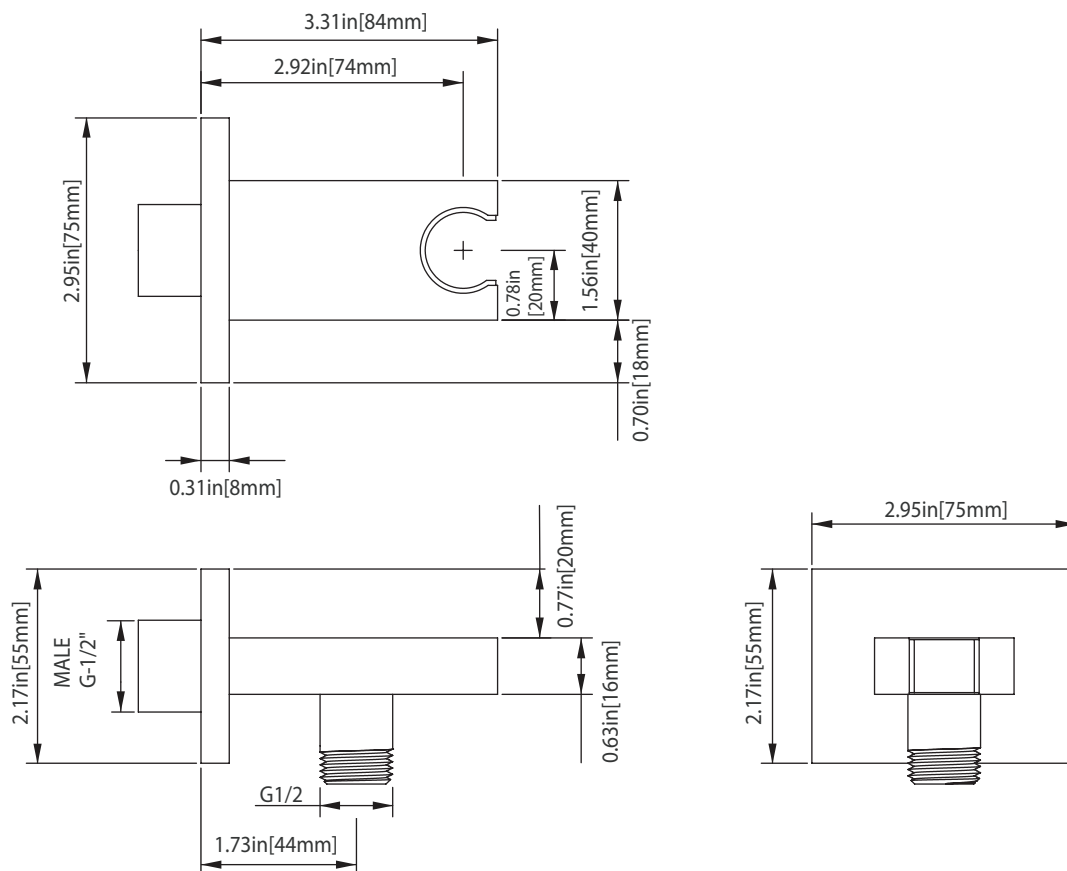

HH.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

Technical Diagram

