


RAR.7300 | Two Output Shower Set W/ Rain Shower, Hand Shower & Slide Bar

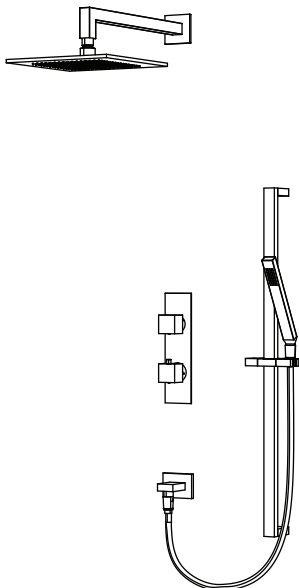

COMPONENTS

- HH1011SA - 16" Shower Arm
- RHB.10S - 10" Shower Head
- RAR.4000VT - Shower Trim
- JVH.2717F - Shower Valve
- HH1006H - Hand Held
- RAR.5505 - Wall Elbow
- HH.150EM - 1.5m Hose
- RAR.601003A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

HAND SHOWER W/ SLIDE BAR & ELBOW:


- Solid Brass construction
- Hand shower flow rate = 6 LPM
- 1/2" male elbow connection

See individual component specification sheets on following pages for further details.


HH1011SA | Square Shower Arm - 400mm - 16"

SPECIFICATIONS:


- Solid Brass Shower Arm
- With Sliding Flange

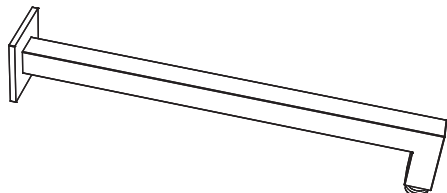

Technical Diagram

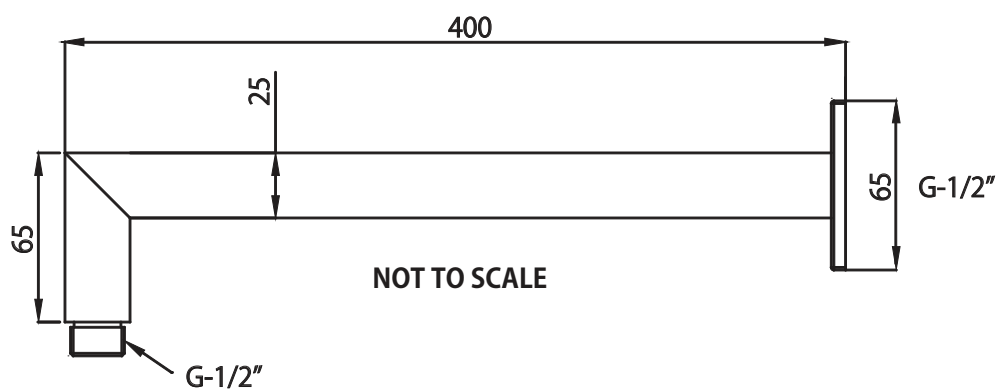


RHB.10S | 10" Brass Shower Head

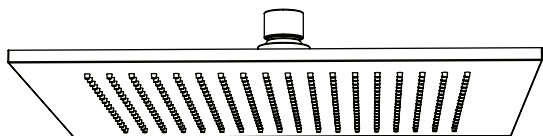

SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 256 Nozzles - [16 x 16]


Technical Diagram

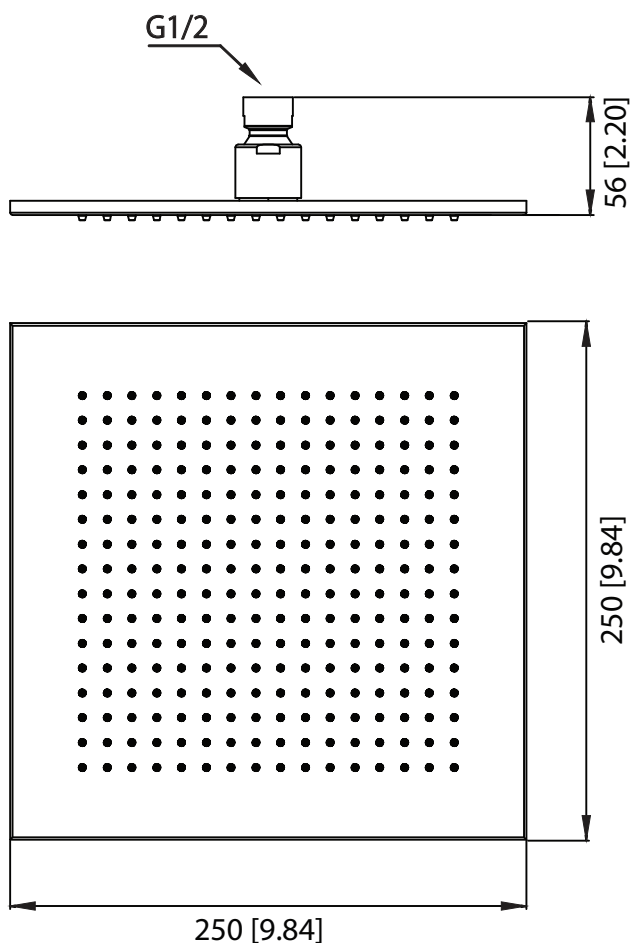

RAR.4000VT | Thermostatic Shower Trim

SPECIFICATIONS:


- Solid Brass construction
- Valve not included - Trim only
- Turn bottom handle to control temperature.
- Turn top handle to control volume.



Technical Diagram



JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

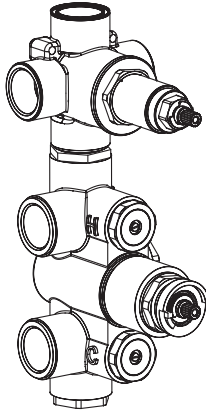


SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E**

! A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

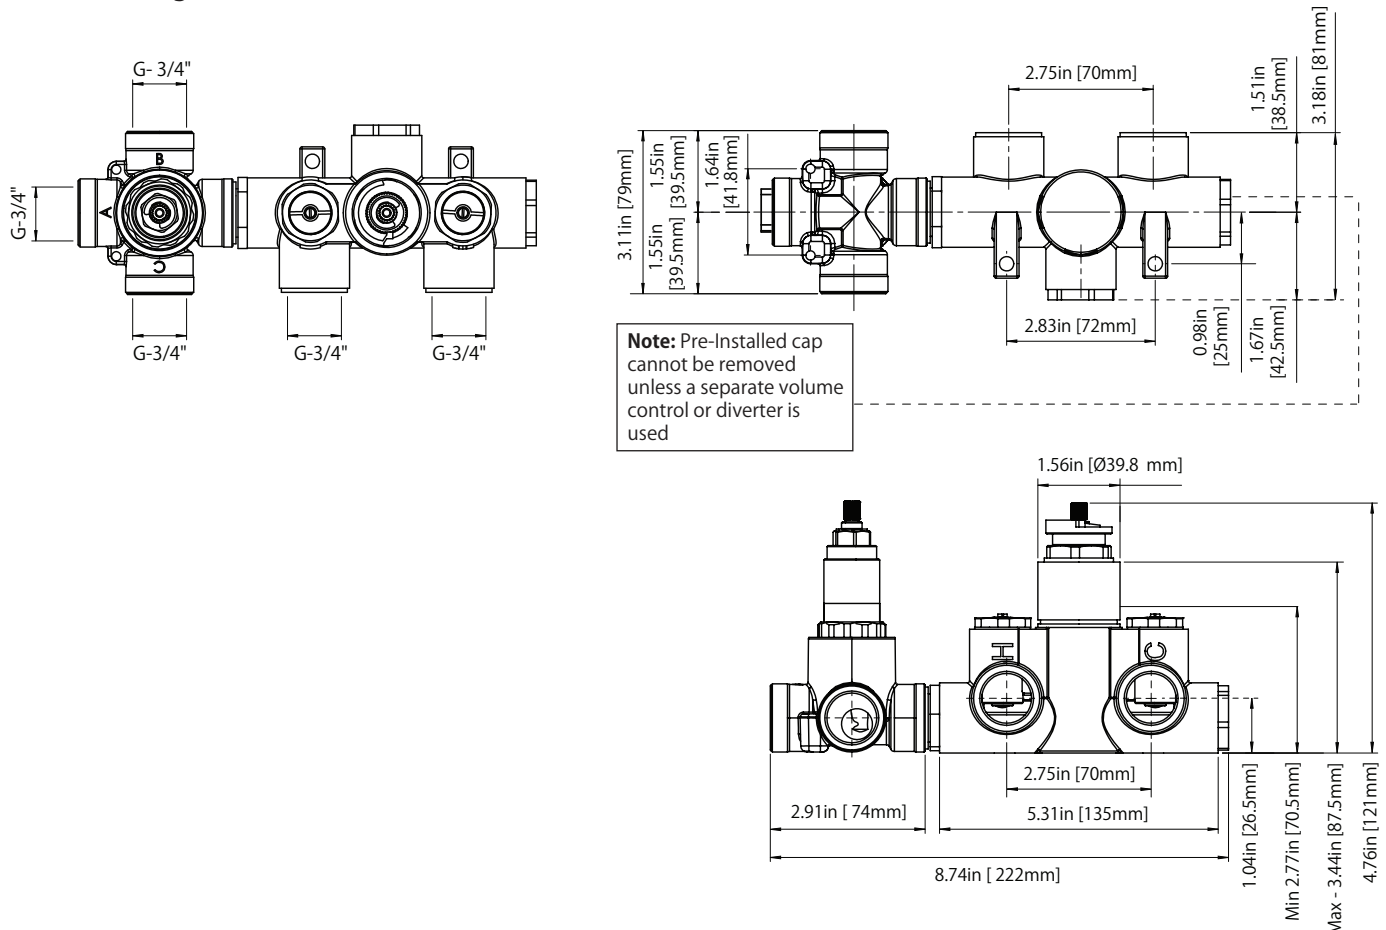


JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

THREE OUPTUT - NO SHARED PORT OPERATION

Diverter Cartridge # - **15100** (Included)

Total 6 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Off - No Water Flow
- Position 3 - Output A Activated
- Position 4 - Off - No Water Flow
- Position 5 - Output C Activated

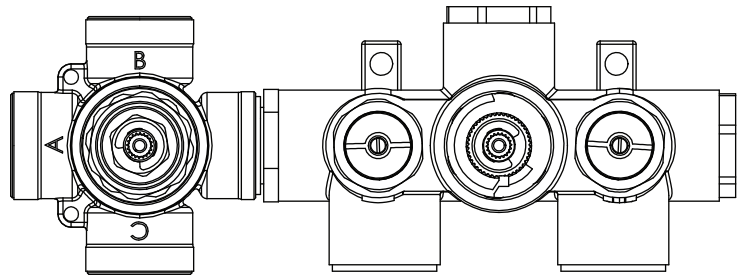

THREE OUPTUT - SHARED PORT OPERATION

Diverter Cartridge # - **15200** (Not Included)


Total 6 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
 - Position 1 - Output B Activated
 - Position 2 - Output B+A Activated
 - Position 3 - Output A Activated
 - Position 4 - Output C+A Activated
 - Position 5 - Output C Activated
-


HH1006H | Solid Brass Hand Shower

SPECIFICATIONS:


- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

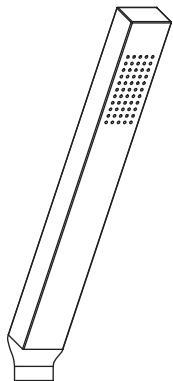

Technical Diagram

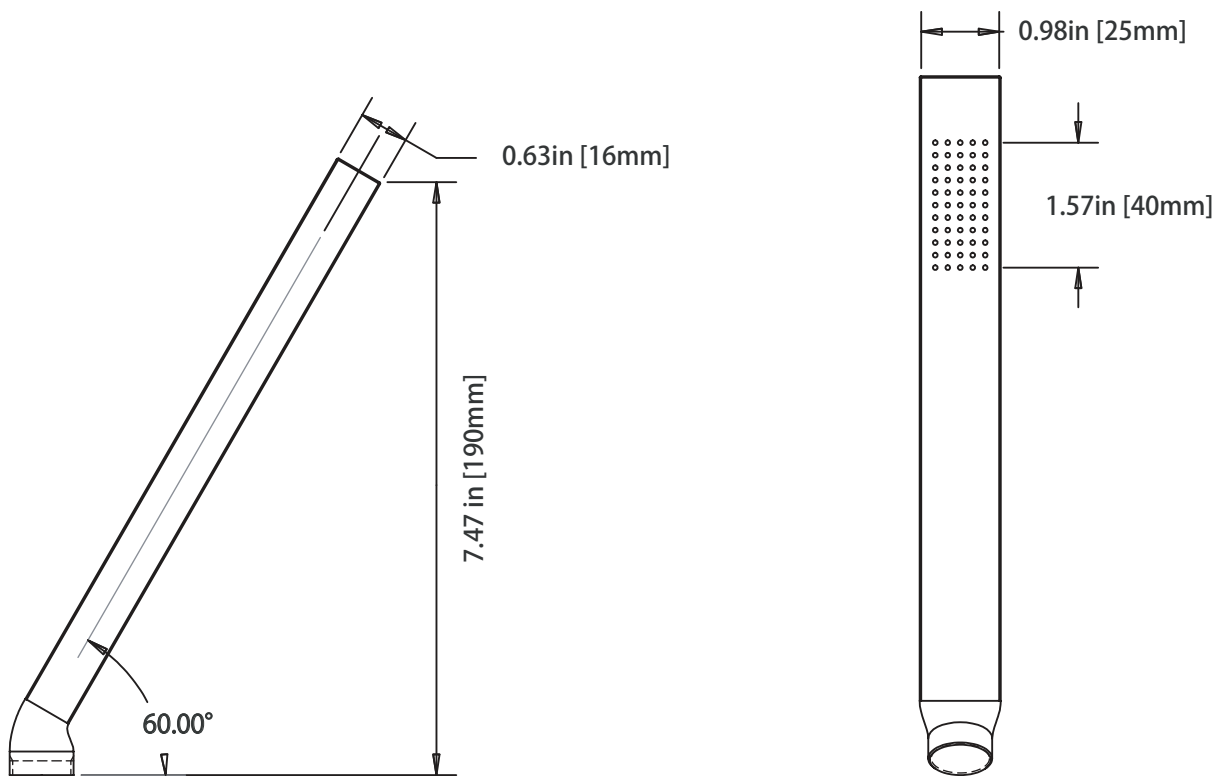

RAR.5505 | Wall Elbow

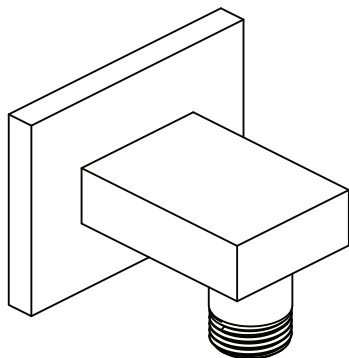

SPECIFICATIONS:

- Solid Brass construction
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention

Technical Diagram




HH.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length


Technical Diagram

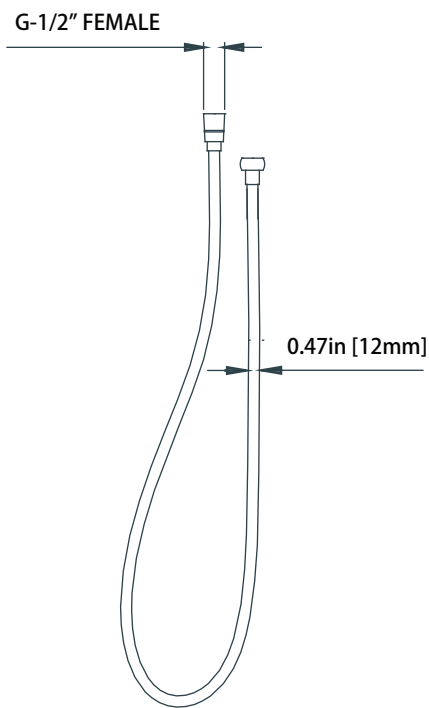

RAR.601003A | Slide Bar

SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation



Technical Diagram

