


RHE.7100 | Two Output Shower Set W/ Rain Shower & Hand Shower

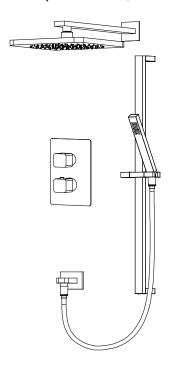

COMPONENTS

• HH1050 - 15" Shower Arm - 8" Shower Head • RHB.10C • RHE.4000T - Shower Trim • JVH.4420F - Shower Valve • HH1006H - Hand Shower - Wall Elbow • RHE.5505 - 1.5m Hose • HH.150EM • RAR.601003A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- No shared ports

SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

HAND SHOWER:

- Solid Brass construction
- 6 LPM flow rate
- · With back flow prevention check valve


See individual component specification sheets on following pages for further details.

Universal Fixtures[™]

HH1050 | Square Shower Arm - 15"


SPECIFICATIONS:

- Solid Brass Shower Arm
- With Fixed Flange

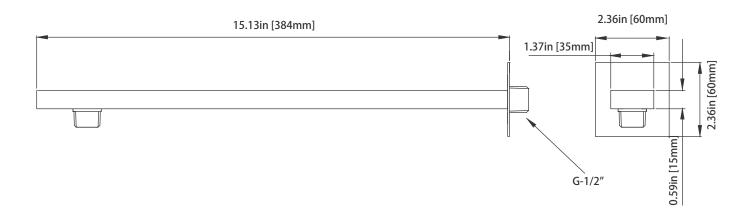


Universal Fixtures™


RHB.10C | 10" Brass Rain Shower



SPECIFICATIONS:


- · Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 200 Nozzles
- Use with HH1050 Shower Arm









RHE.4000T | Thermostatic Shower Trim



SPECIFICATIONS:


- Solid Brass construction
- Valve not included trim only
- Turn bottom handle to control temperature.
- Turn top handle to divert water & control volume
- Extension Available JVH.4101E**

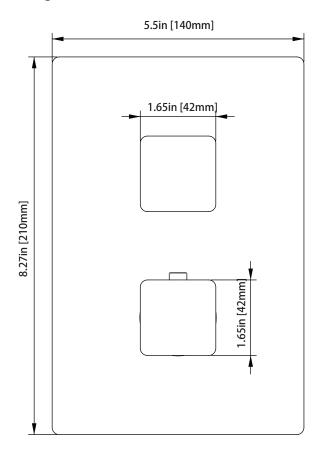

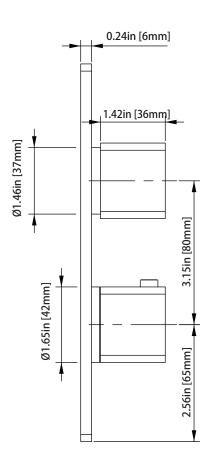

Universal Fixtures ™


JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2



SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4101E**

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

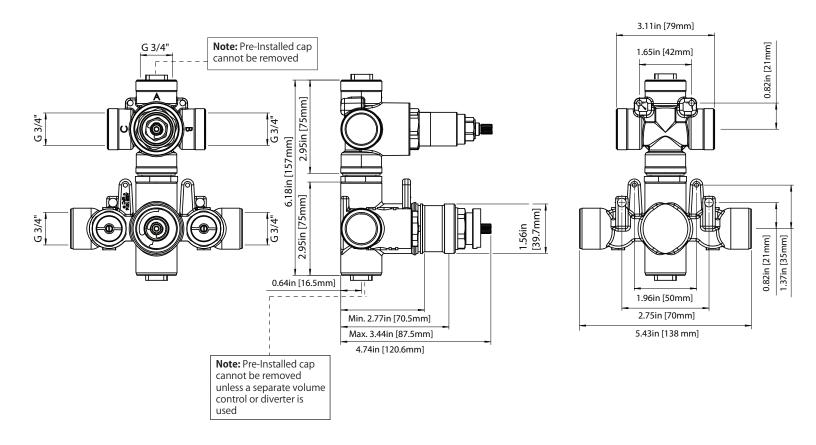

JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

TWO OUPTUT - NO SHARED PORT OPERATION

Diverter Cartridge # - 15109 (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.


- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output C Activated

TWO OUPTUT - SHARED PORT OPERATION


Diverter Cartridge # - 15103 (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output B+C Activated
- Position 3 Output C Activated

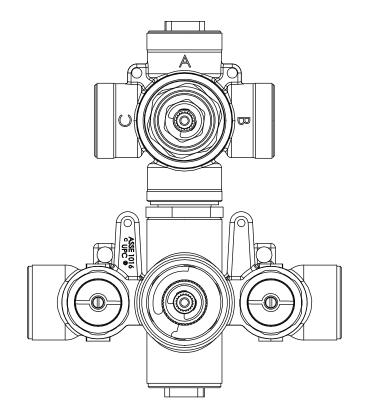

Water Diversion Diagram

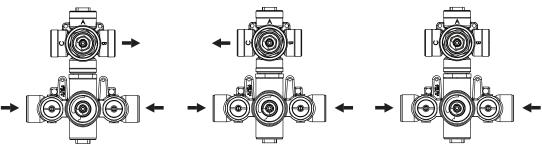


Diverter Position = 1

Diverter Position = 2

Diverter Position = off


Universal Fixtures ™


HH1006H | Solid Brass Hand Shower



SPECIFICATIONS:


- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

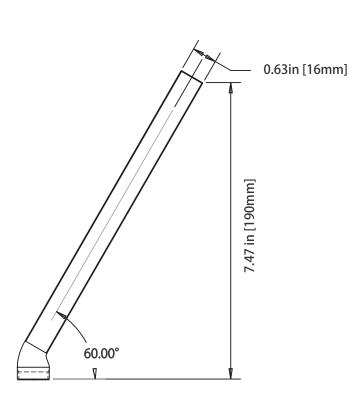

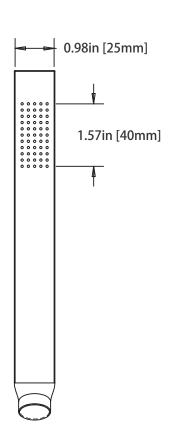





RHE.5505 | Wall Elbow





SPECIFICATIONS:

- Solid Brass construction
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention










Universal Fixtures[™]

HH.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

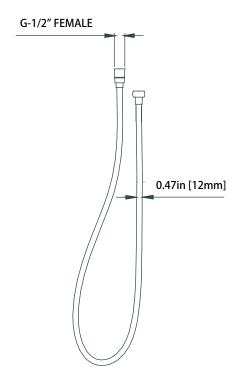



RAR.601003A | Slide Bar



SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation

