


## RHE.7200 | Two Output Shower Set W/ Rain Shower & Hand Shower

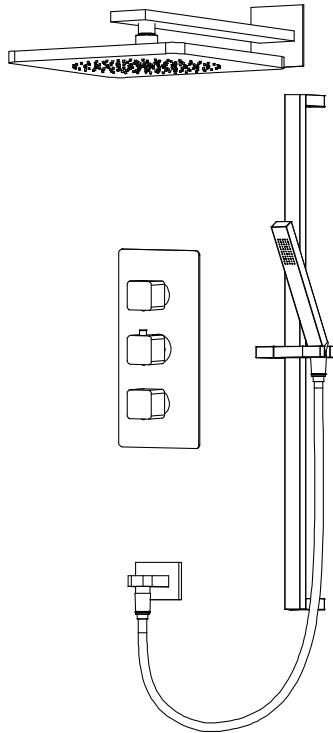

### COMPONENTS

- HH1060 - 16" Shower Arm
- RHB.12C - 12" Shower Head
- RHE.4500T - Shower Trim
- JVH.4401 - Shower Valve
- HH1006H - Hand Shower
- RHE.5505 - Wall Elbow
- HH.150EM - 1.5m Hose
- RAR.601003A - Slide Bar

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Bottom handle controls handheld
- Top handle controls shower head
- Middle handle controls temperature
- Shared port operation

### SHOWER HEAD:

- Solid Brass construction / 11 LPM

### HAND SHOWER W/ SLIDE BAR & ELBOW:


- Solid Brass construction
- Hand shower flow rate = 6 LPM
- 1/2" male elbow connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


## HH1060 | Square Shower Arm - 16"

### SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

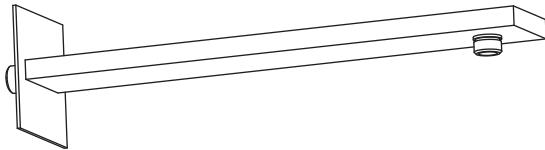


### Technical Diagram

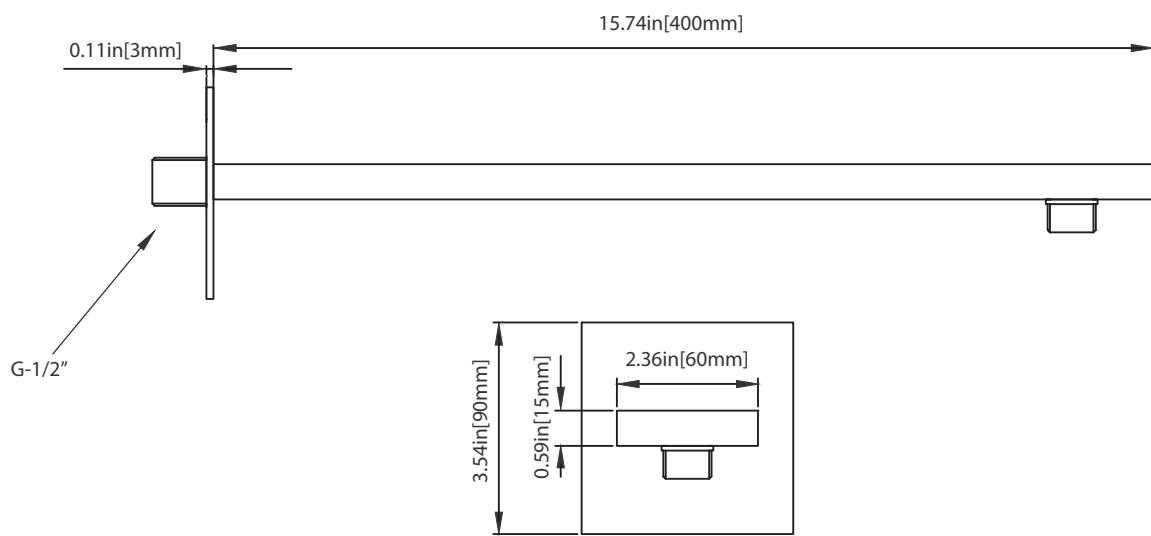


## RHB.12C | 12" Brass Rain Shower

## SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 196 Nozzles

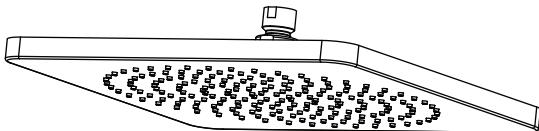

## Technical Diagram

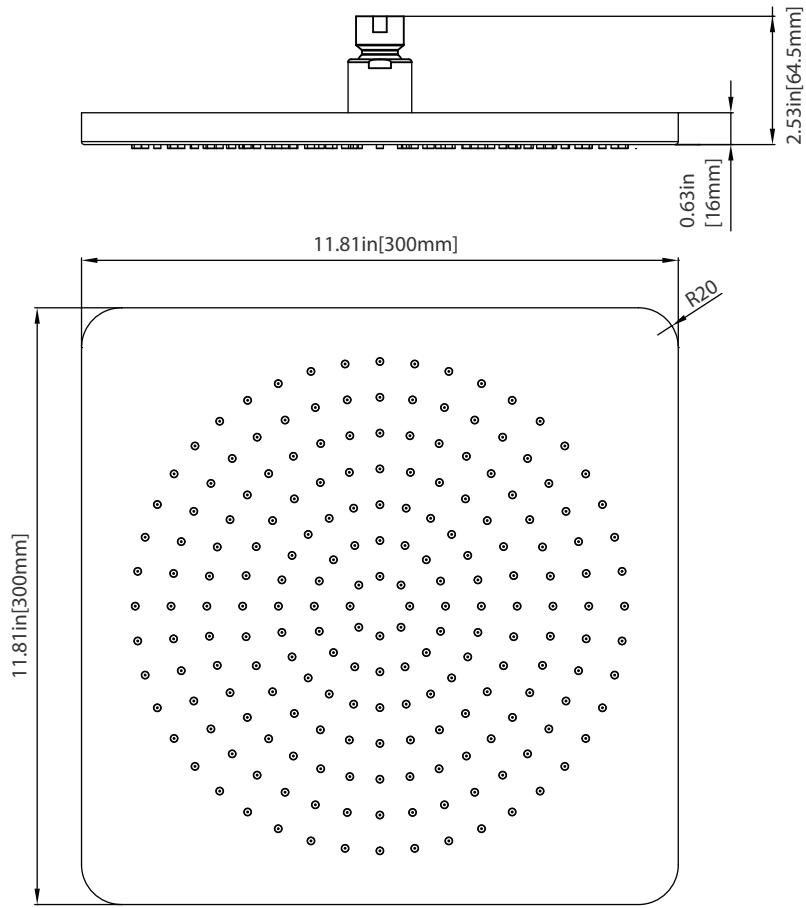


## RHE.4500T | Thermostatic Shower Trim

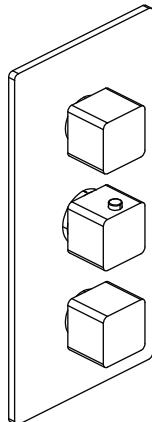

### SPECIFICATIONS:

- Solid Brass construction
- Trim only - valve not included
- Turn middle knob to control temperature.
- Turn top knob to divert water flow between two top outlets.
- Turn bottom knob to control water flow of bottom outlet.
- Extension Available - JVH.4401E\*\*


### Technical Diagram

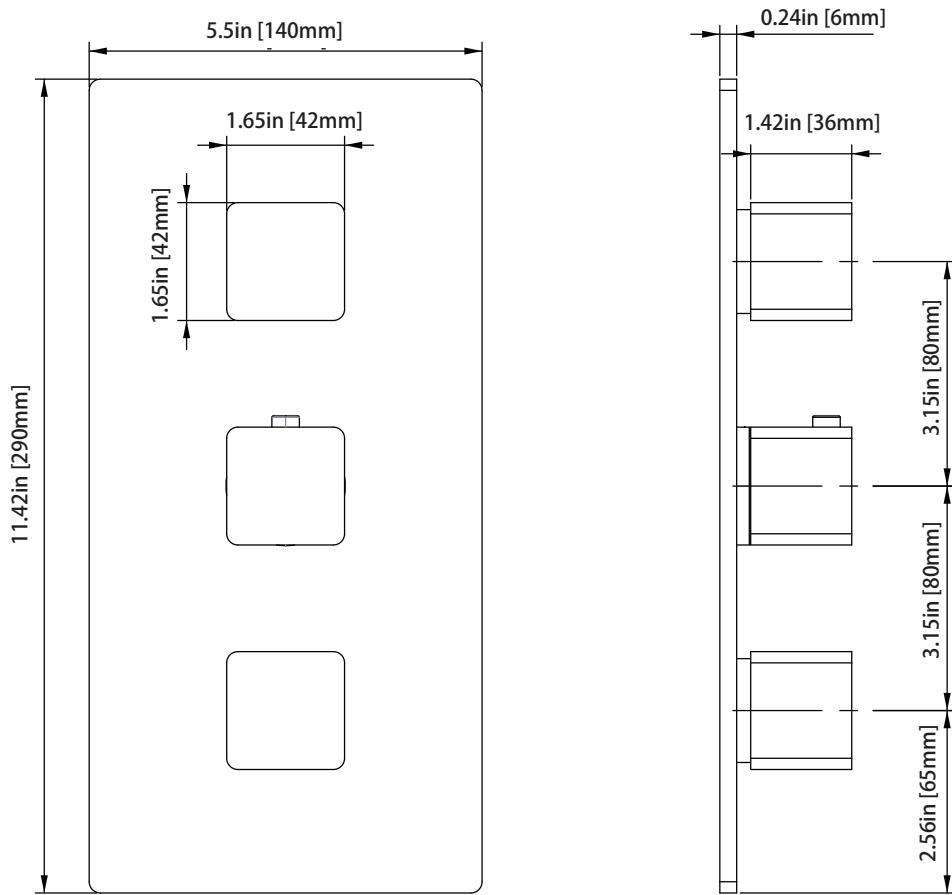

## JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output


Page 1 of 2

### SPECIFICATIONS:

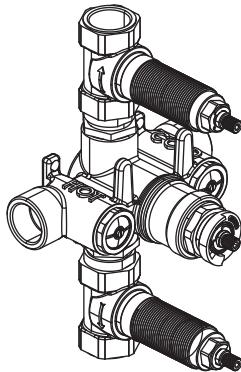


- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4401E\*\*

### Technical Diagram

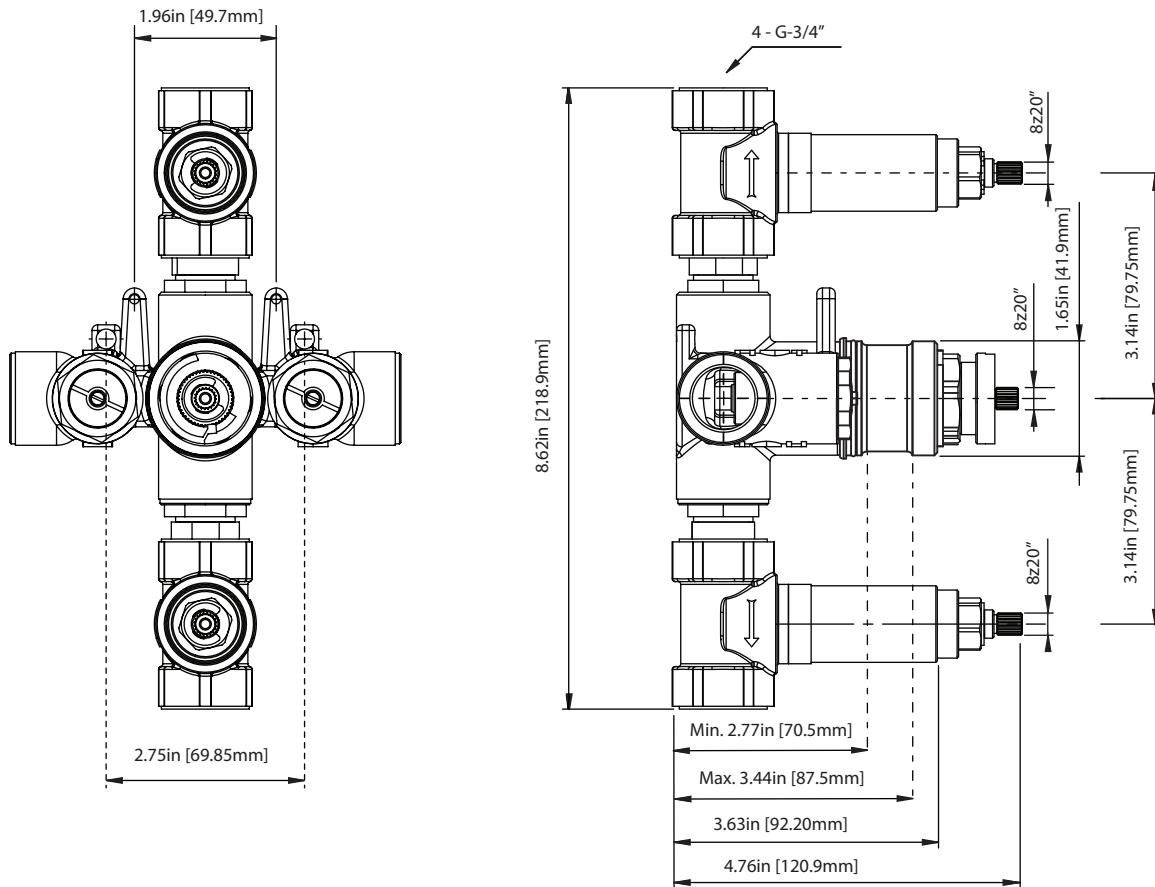

JVH.4401 | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2


Water Flow Diagram

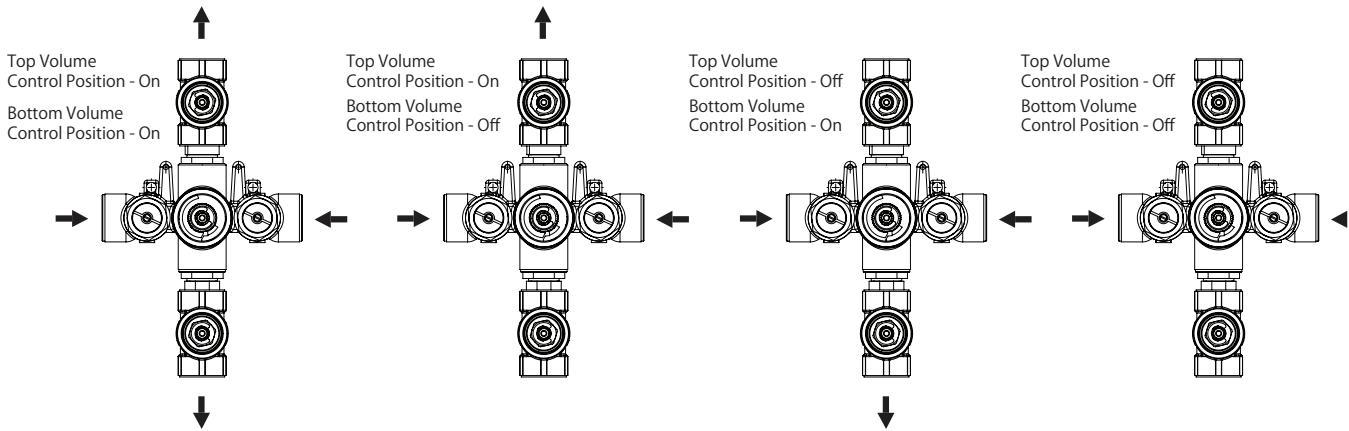


## HH1006H | Solid Brass Hand Shower

### SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

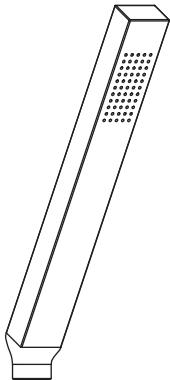


### Technical Diagram

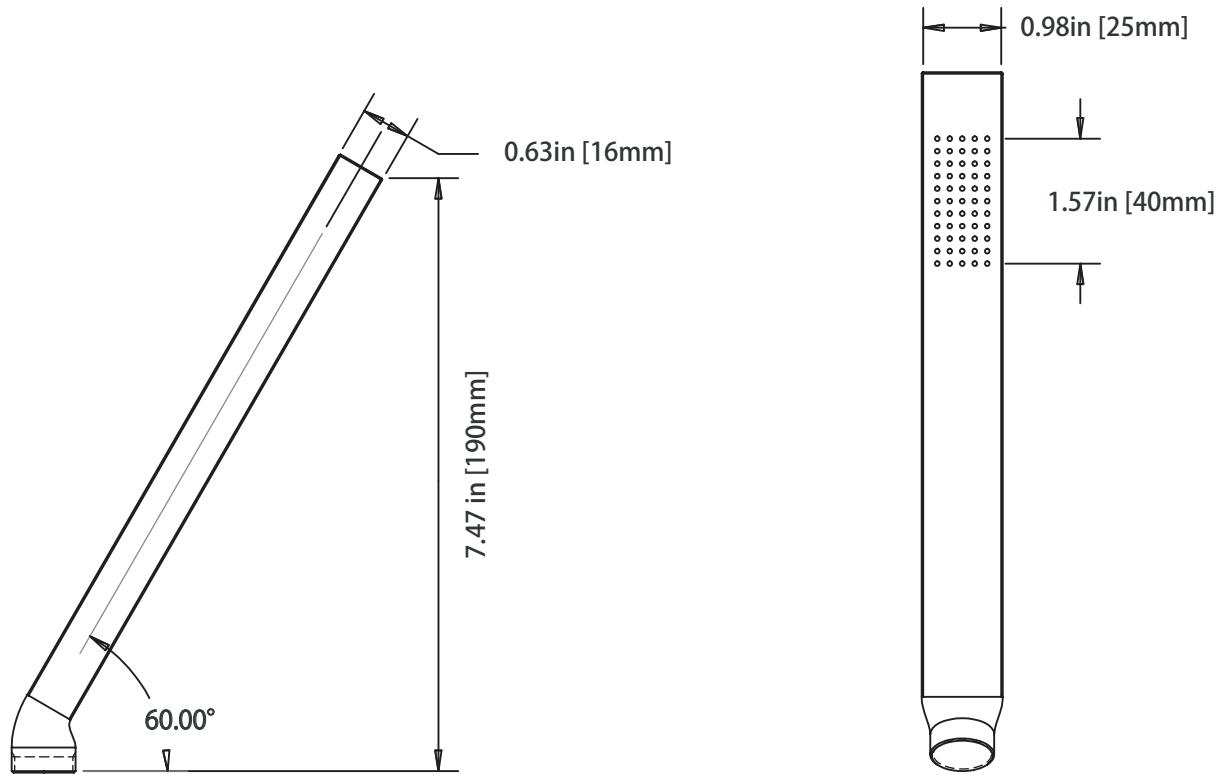


## RHE.5505 | Wall Elbow

### SPECIFICATIONS:

- Solid Brass construction
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention



### Technical Diagram

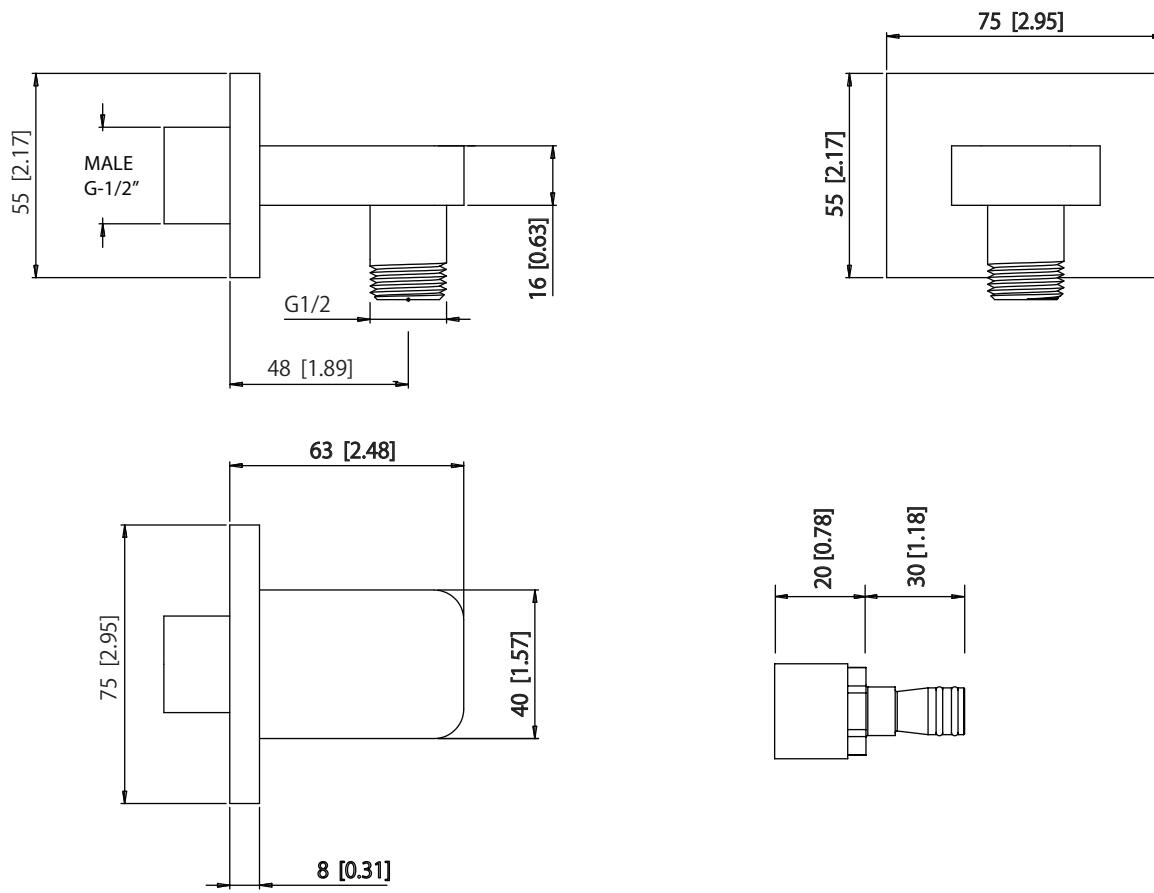


## HH.150EM | Easy Maneuver Hose

### SPECIFICATIONS:



- Stainless steel construction
- G-1/2" connection
- 1.5m length


### Technical Diagram

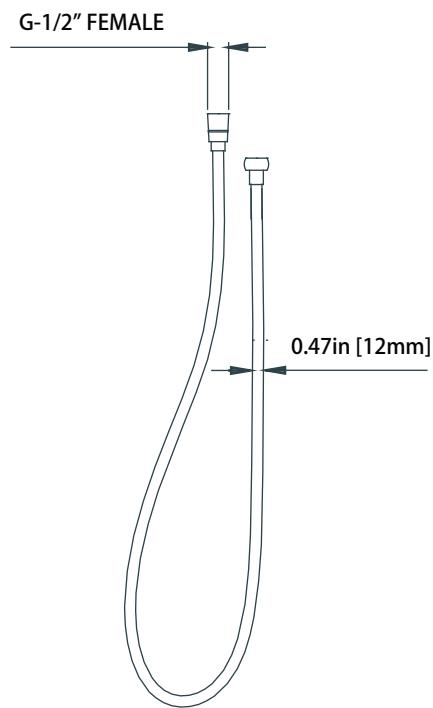

## RAR.601003A | Slide Bar

### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation



### Technical Diagram

