


RHE.7300 | Two Output Shower Set W/ Rain Shower, Hand Shower & Slide Bar

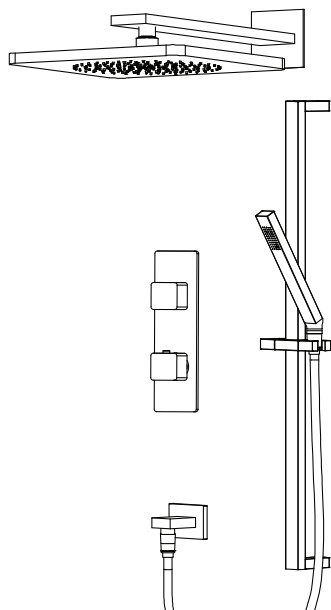

COMPONENTS

- HH1060 - 16" Shower Arm
- RHB.12C - 12" Shower Head
- RHE.4000VT - Shower Trim
- JVH.2717F - Shower Valve
- HH1006H - Hand Held
- RHE.5505 - Wall Elbow
- HH.150EM - 1.5m Hose
- RAR.601003A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

HAND SHOWER W/ SLIDE BAR & ELBOW:


- Solid Brass construction
- Hand shower flow rate = 6 LPM
- 1/2" male elbow connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


HH1060 | Square Shower Arm - 16"

SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

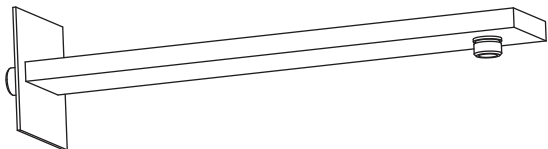


Technical Diagram

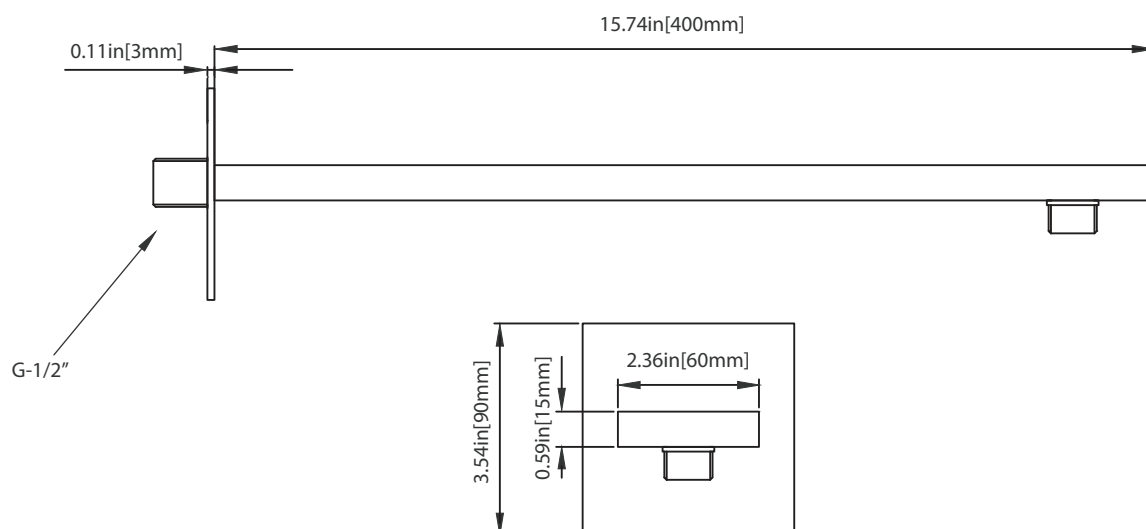


RHB.12C | 12" Brass Rain Shower

SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 196 Nozzles

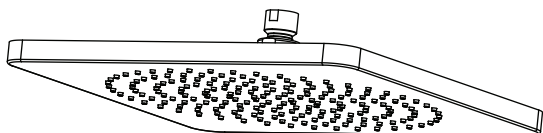

Technical Diagram

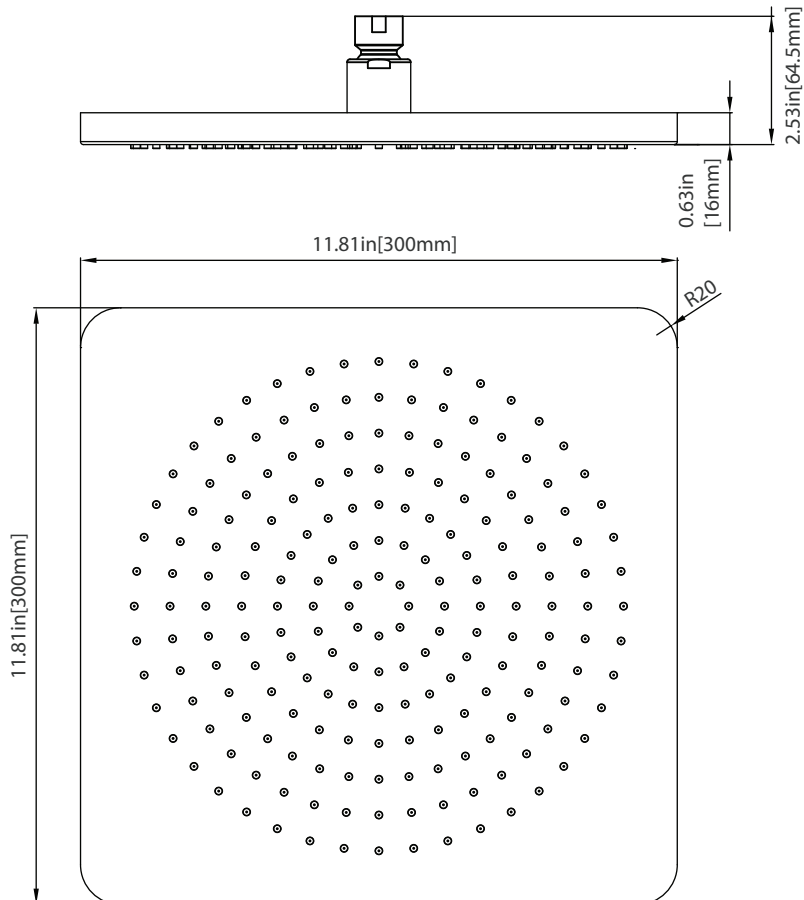


RHE.4000VT | Thermostatic Shower Trim




SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Turn bottom handle to control temperature.
- Turn top handle to control volume.
- Extension Available - JVH.4101E**

Technical Diagram

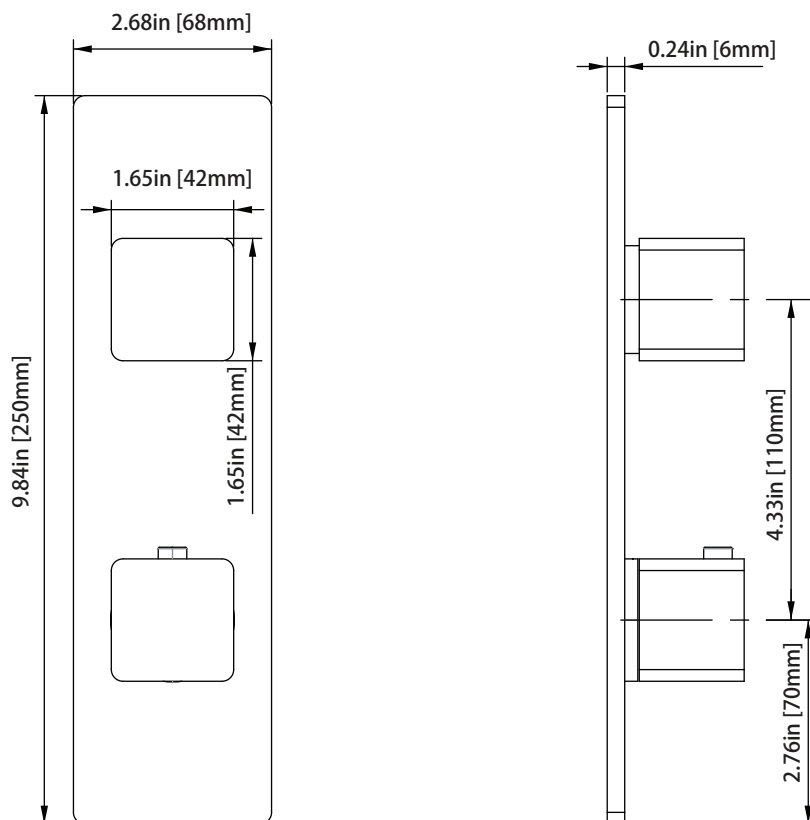

JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

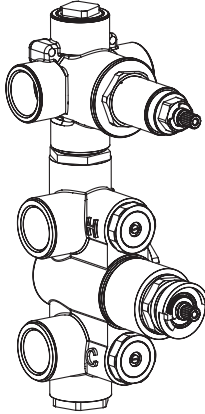


SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E**

! A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

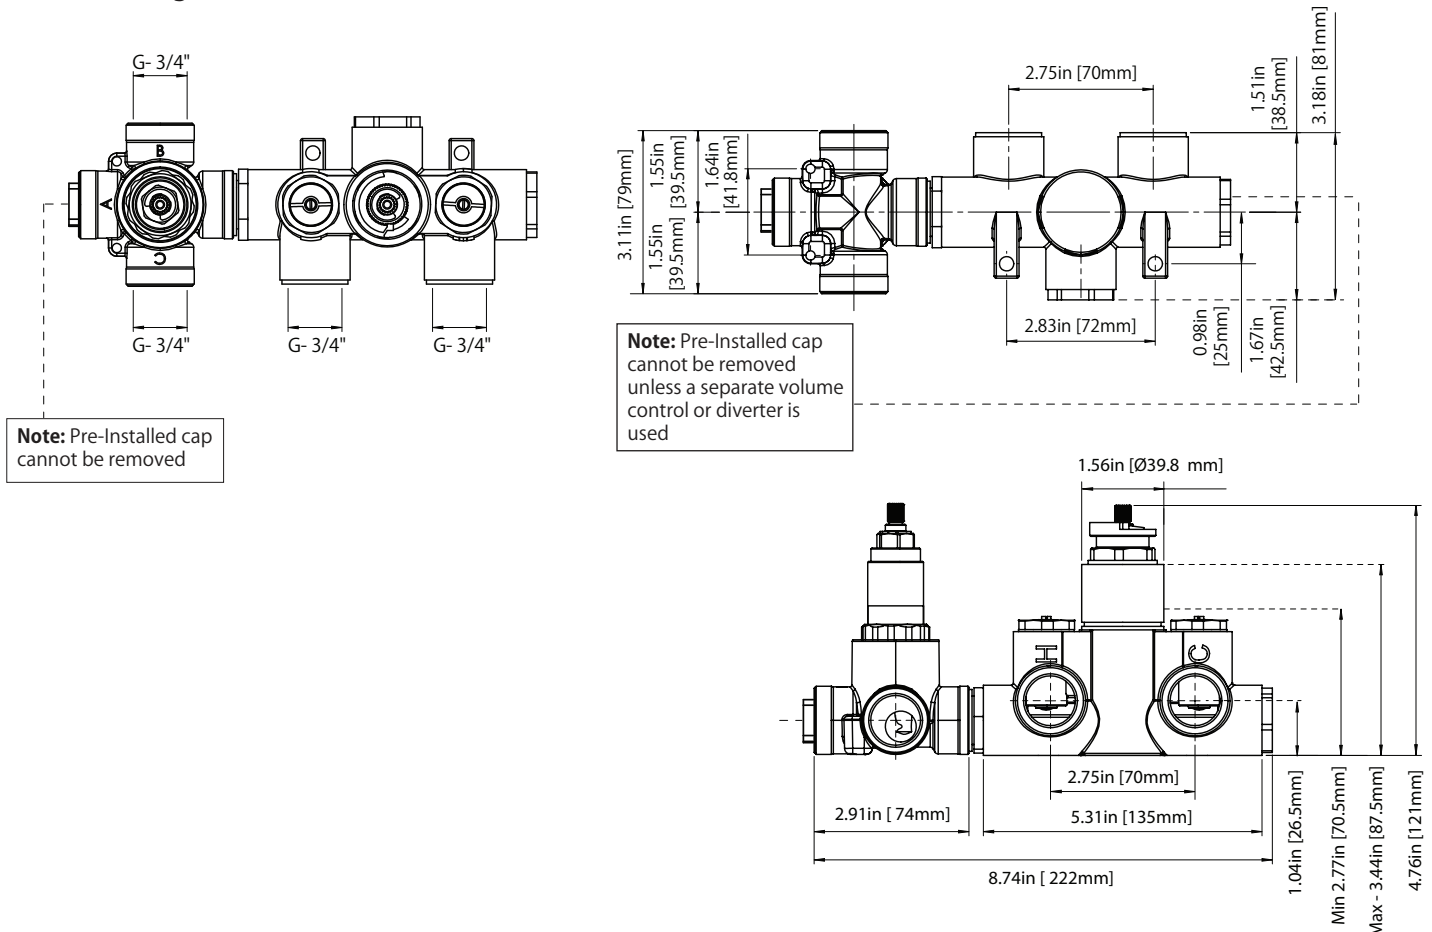


JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

TWO OUPUT - CAL-GREEN - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

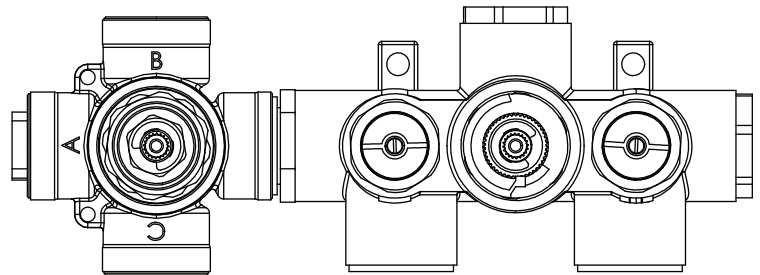

TWO OUPUT - SHARED PORT OPERATION

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated


HH1006H | Solid Brass Hand Shower

SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

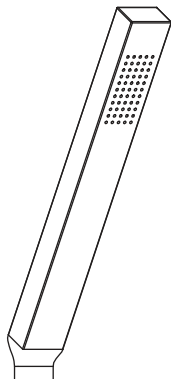


Technical Diagram

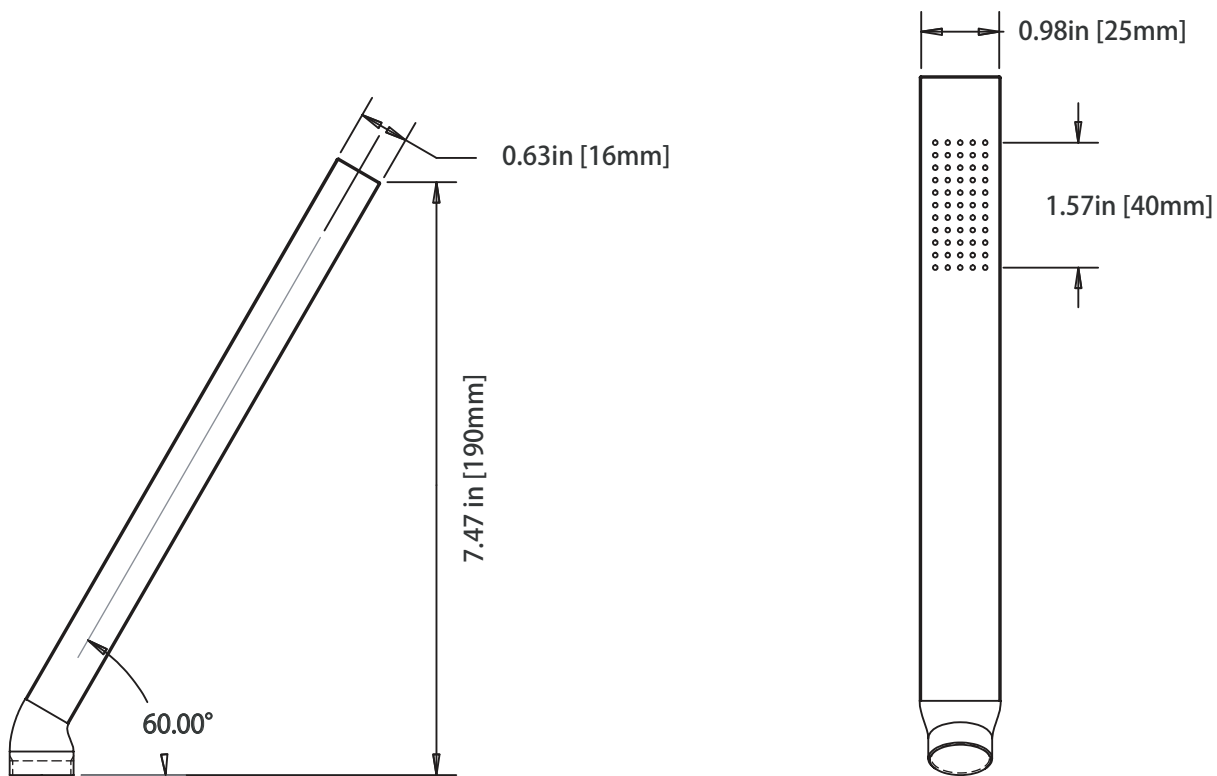


RHE.5505 | Wall Elbow

SPECIFICATIONS:

- Solid Brass construction
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention



Technical Diagram

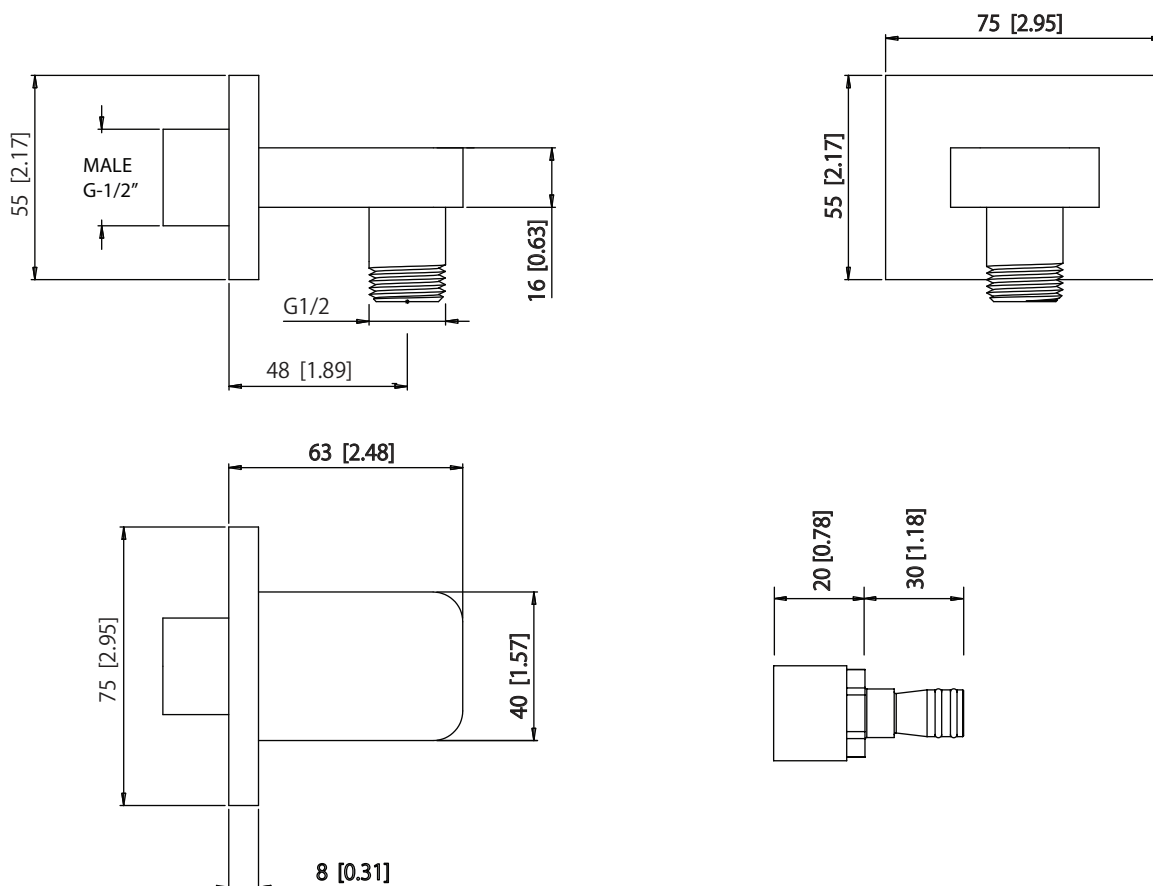


HH.150EM | Easy Maneuver Hose




SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

Technical Diagram

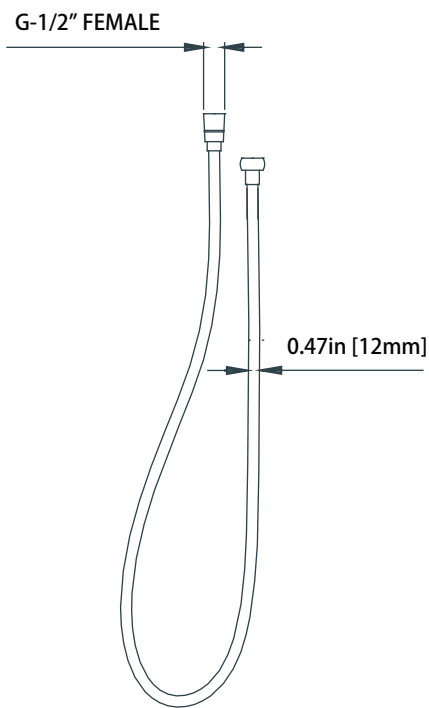

RAR.601003A | Slide Bar



SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation

Technical Diagram

