


## RHE.7350 | Two Output Shower Set W/ Rain Shower, Hand Shower & Slide Bar

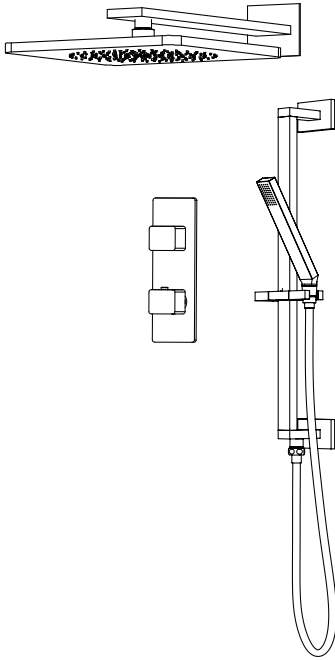

### COMPONENTS

- HH1060 - 16" Shower Arm
- RHB.12C - 12" Shower Head
- RHE.4000VT - Shower Trim
- JVH.2717F - Shower Valve
- HH1006H - Hand Shower
- RAR.601024A - Slide Bar w/ Elbow
- HH.150EM - 1.5m Hose

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

### HAND SHOWER W/ SLIDE BAR & ELBOW:


- Solid Brass construction
- Hand shower flow rate = 6 LPM
- 1/2" male elbow connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


## HH1060 | Square Shower Arm - 16"

### SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

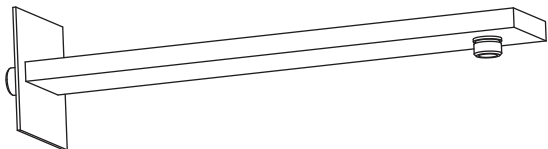


### Technical Diagram

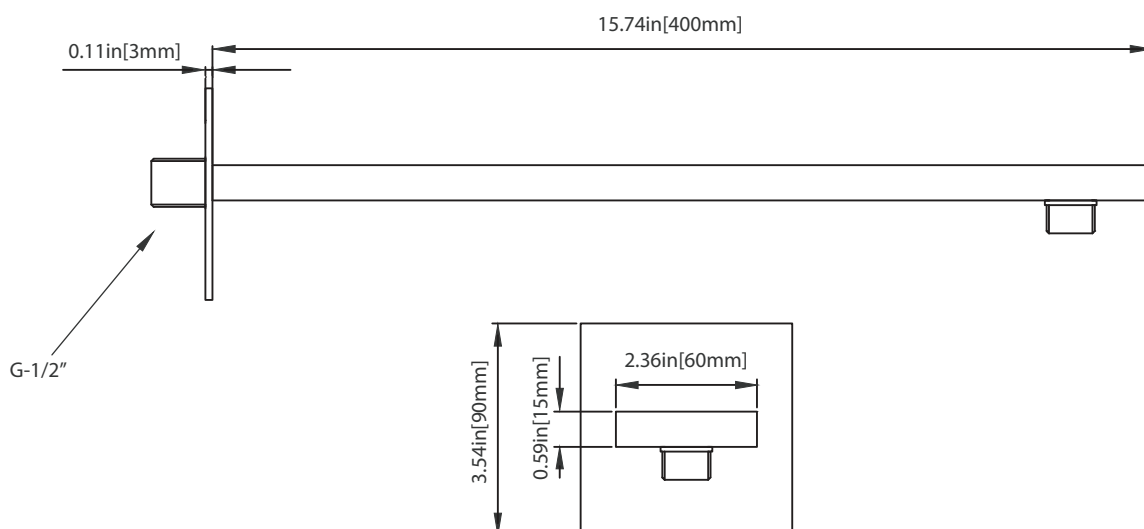


## RHB.12C | 12" Brass Rain Shower

### SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 196 Nozzles

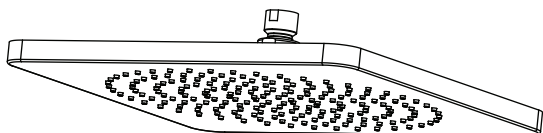

### Technical Diagram

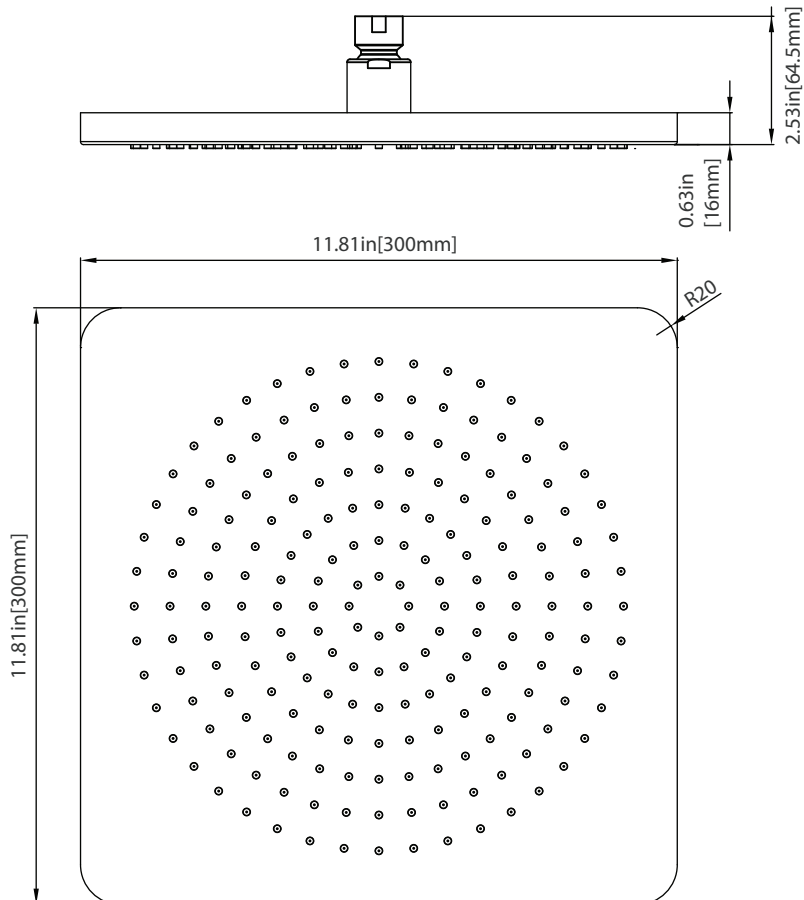


## RHE.4000VT | Thermostatic Shower Trim




### SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Turn bottom handle to control temperature.
- Turn top handle to control volume.
- Extension Available - JVH.4101E\*\*

### Technical Diagram

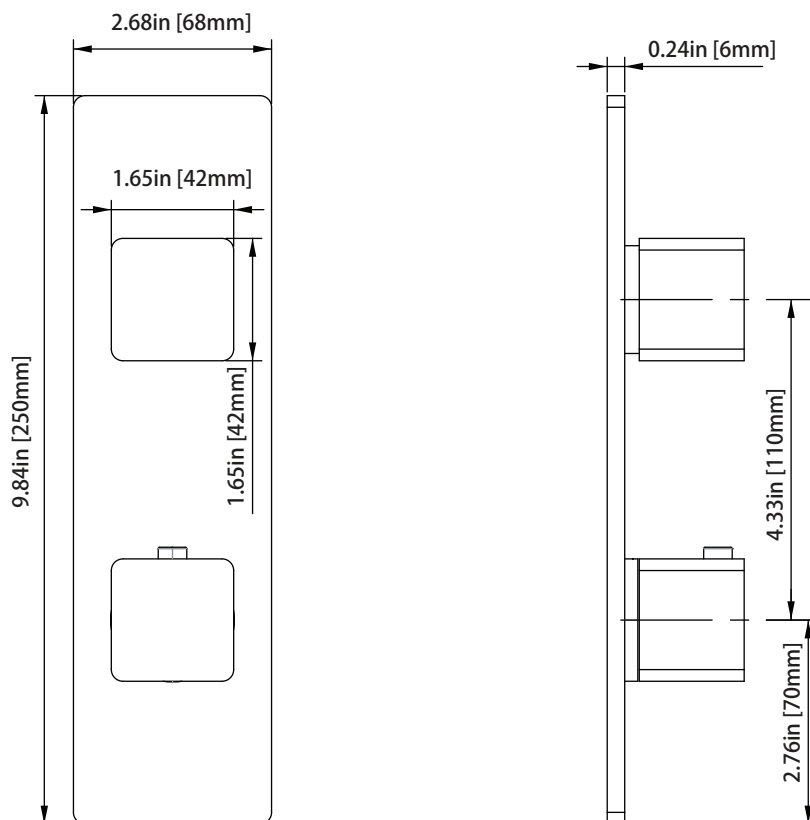

## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

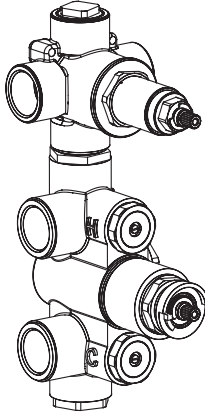


### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*

**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

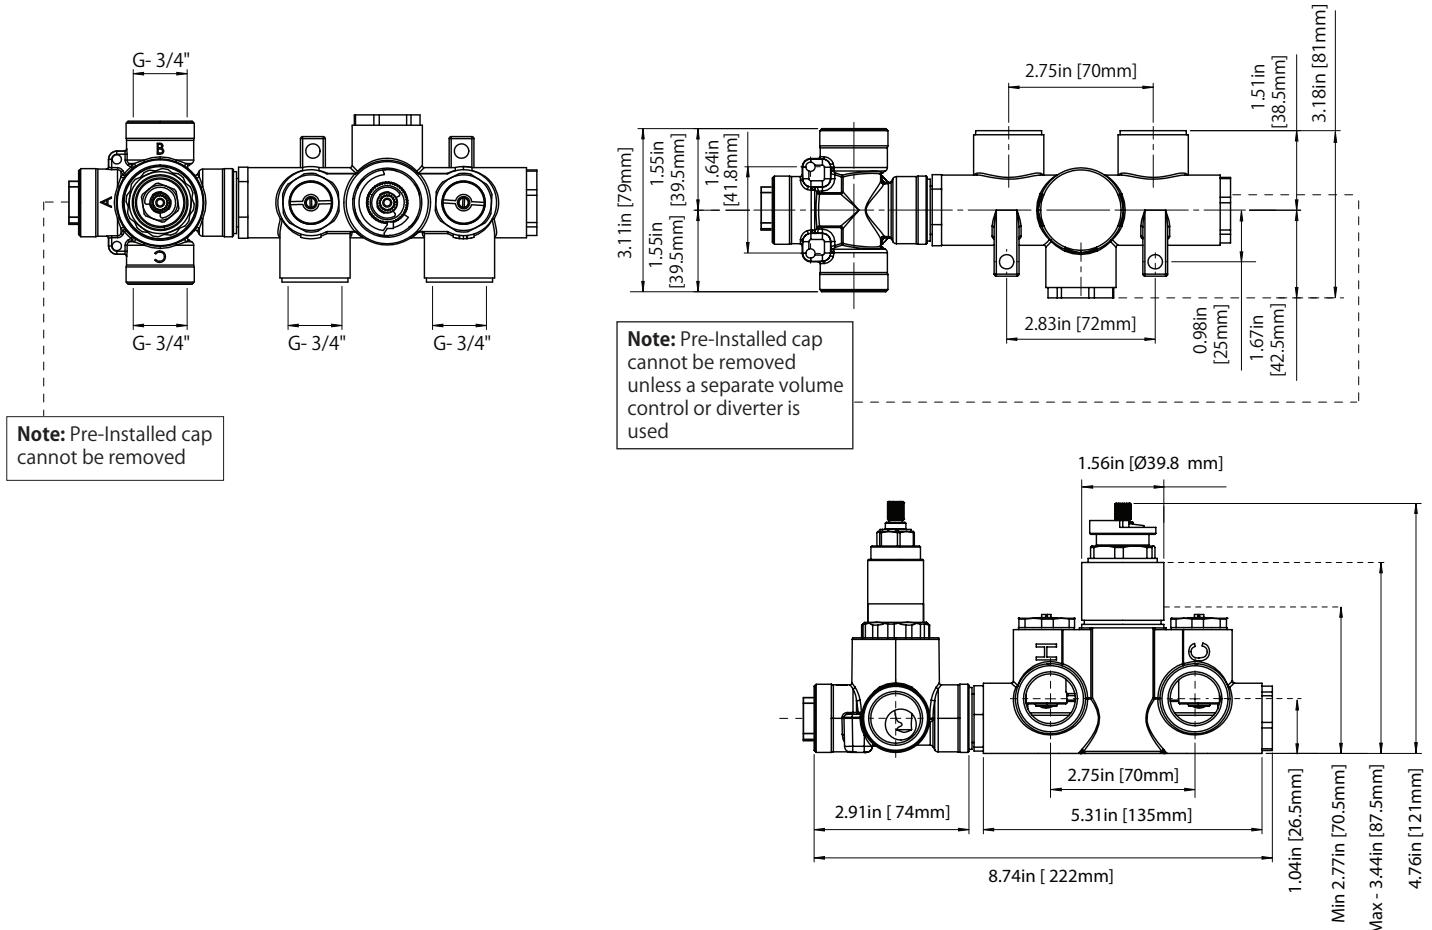

---

## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2


### TWO OUPUT - CAL-GREEN - NO SHARED PORT OPERATION

---

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

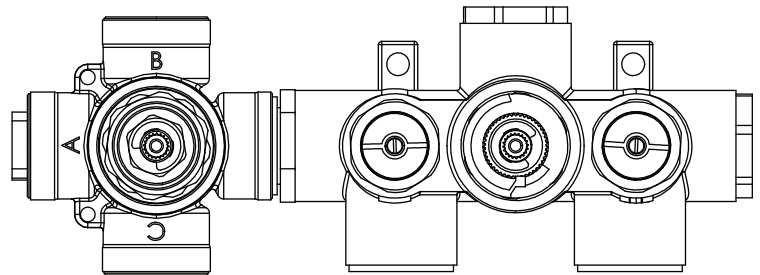

### TWO OUPUT - SHARED PORT OPERATION

---

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated


## HH1006H | Solid Brass Hand Shower

### SPECIFICATIONS:


- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

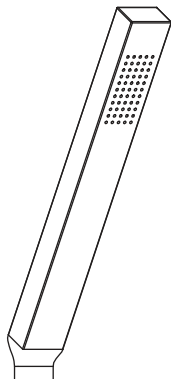

### Technical Diagram

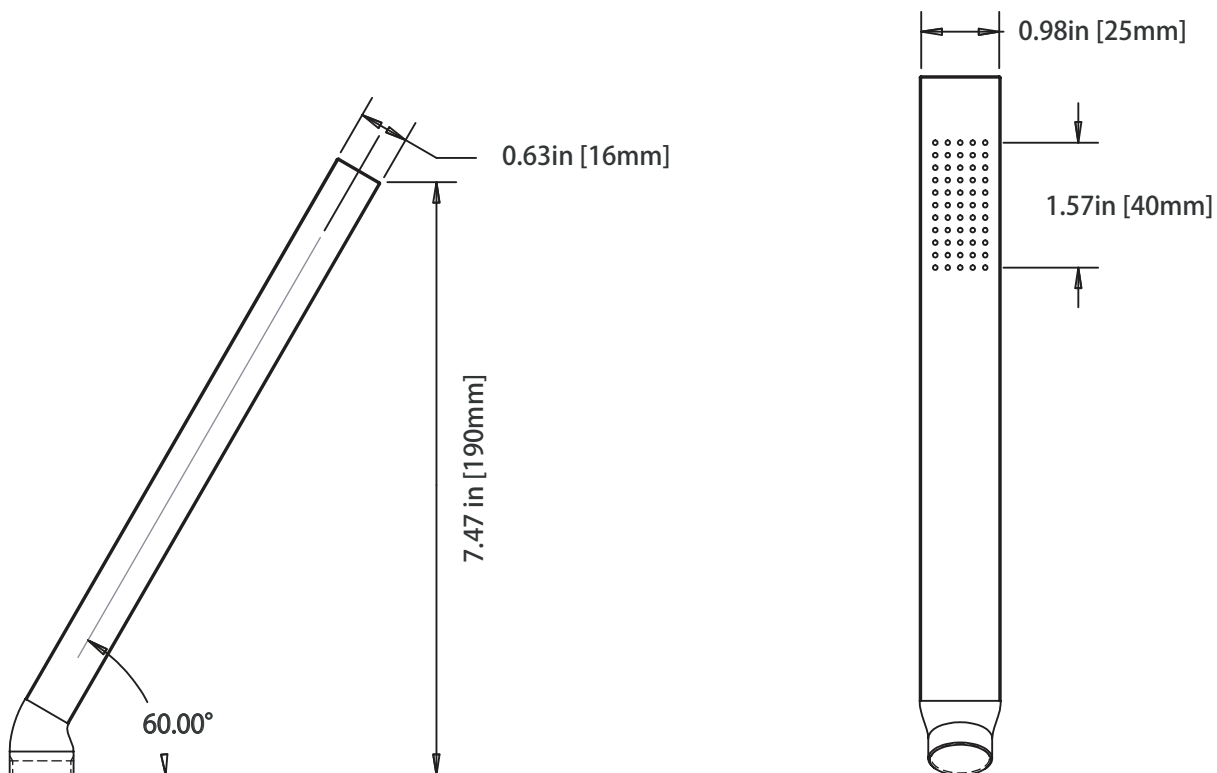


## RAR.601024A | Slide Bar With Integrated Wall Elbow



### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation
- Integrated wall elbow
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention

### Technical Diagram

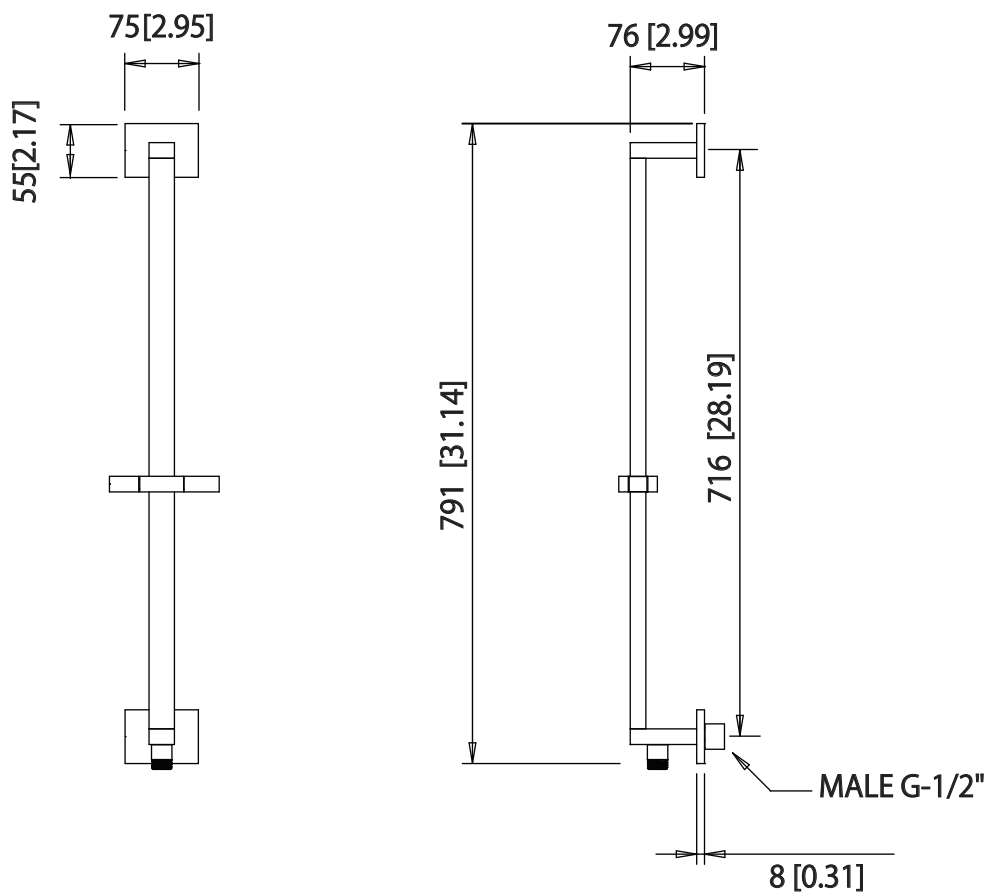



## HH.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

