


## SER.7100 | Two Output Shower Set W/ Rain Shower, Hand Shower & Slide Bar

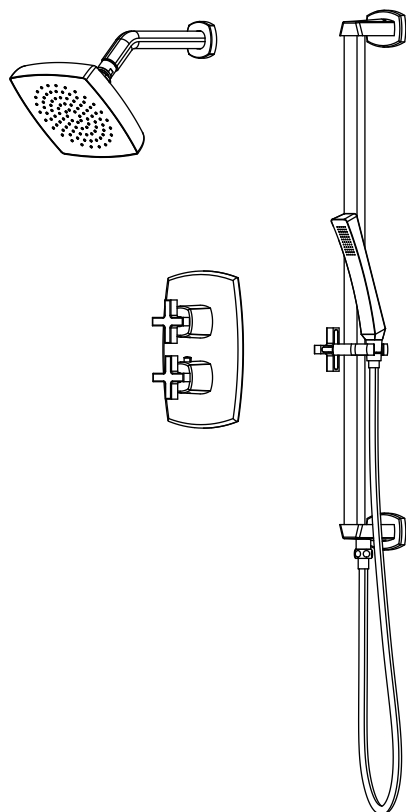

### COMPONENTS

- JHW.7C - 7" Head w/ 8" Arm
- SER.4000T - Shower Trim
- JVH.4420F - Shower Valve
- HH1026H - Hand Held
- SER.601005A - Slide Bar
- HH.150EM - 1.5m Hose

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

### HAND HELD W/ SLIDE BAR & ELBOW:


- Solid Brass construction
- Hand held flow rate = 6 LPM
- 1/2" male elbow connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


## JHW.7C | 7" Brass Shower Head With 8" Wall Mounted Shower Arm

### SPECIFICATIONS:


- Solid Brass construction
- With Swivel action
- Shower arm has sliding flange

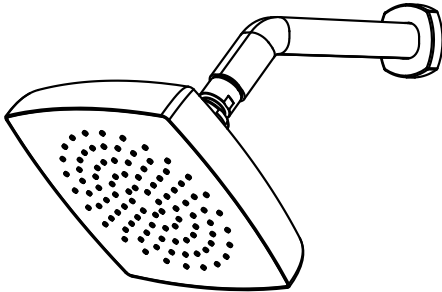

### Technical Diagram

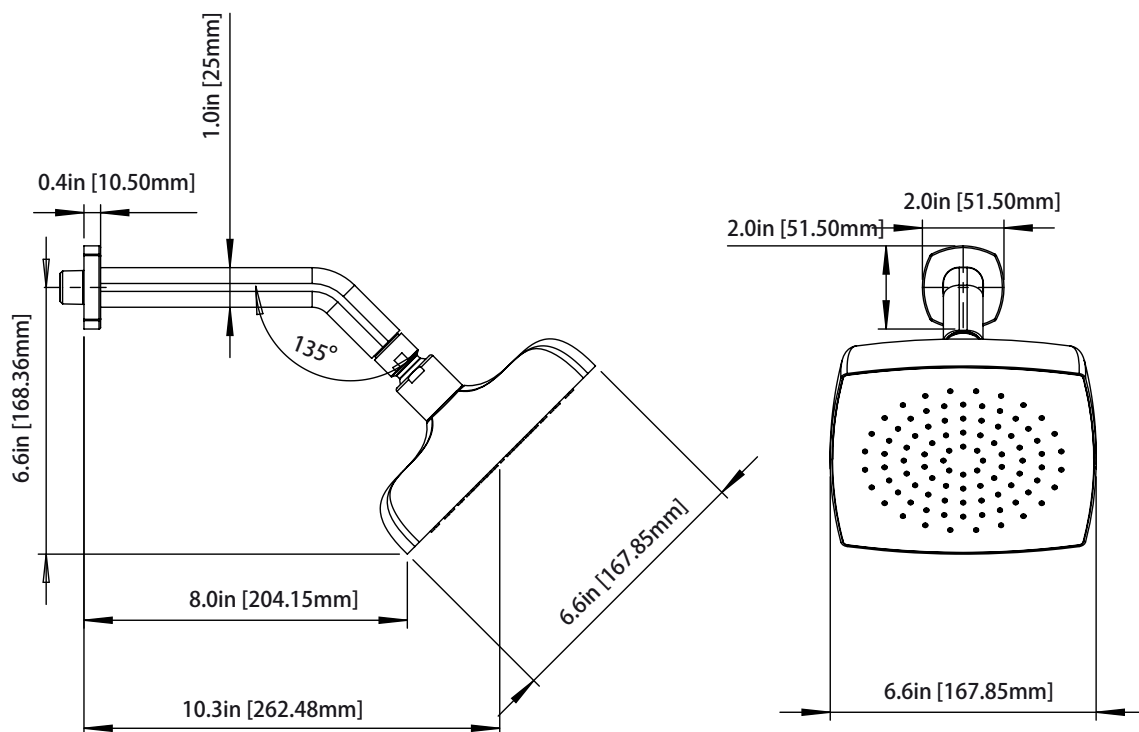


## SER.4000T | Thermostatic Shower Trim



### SPECIFICATIONS:

- Solid Brass Construction
- Valve not included - Trim only
- Turn bottom handle to control temperature.
- Turn top handle to control volume.


### Technical Diagram

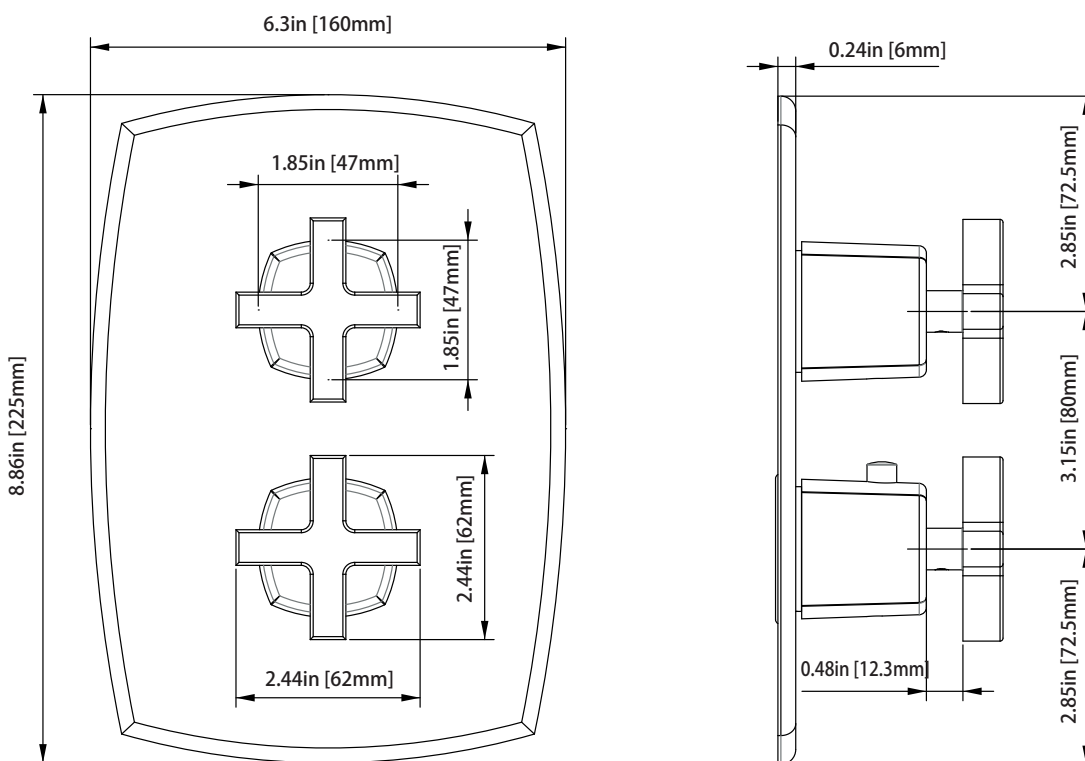

## JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2


### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*



**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

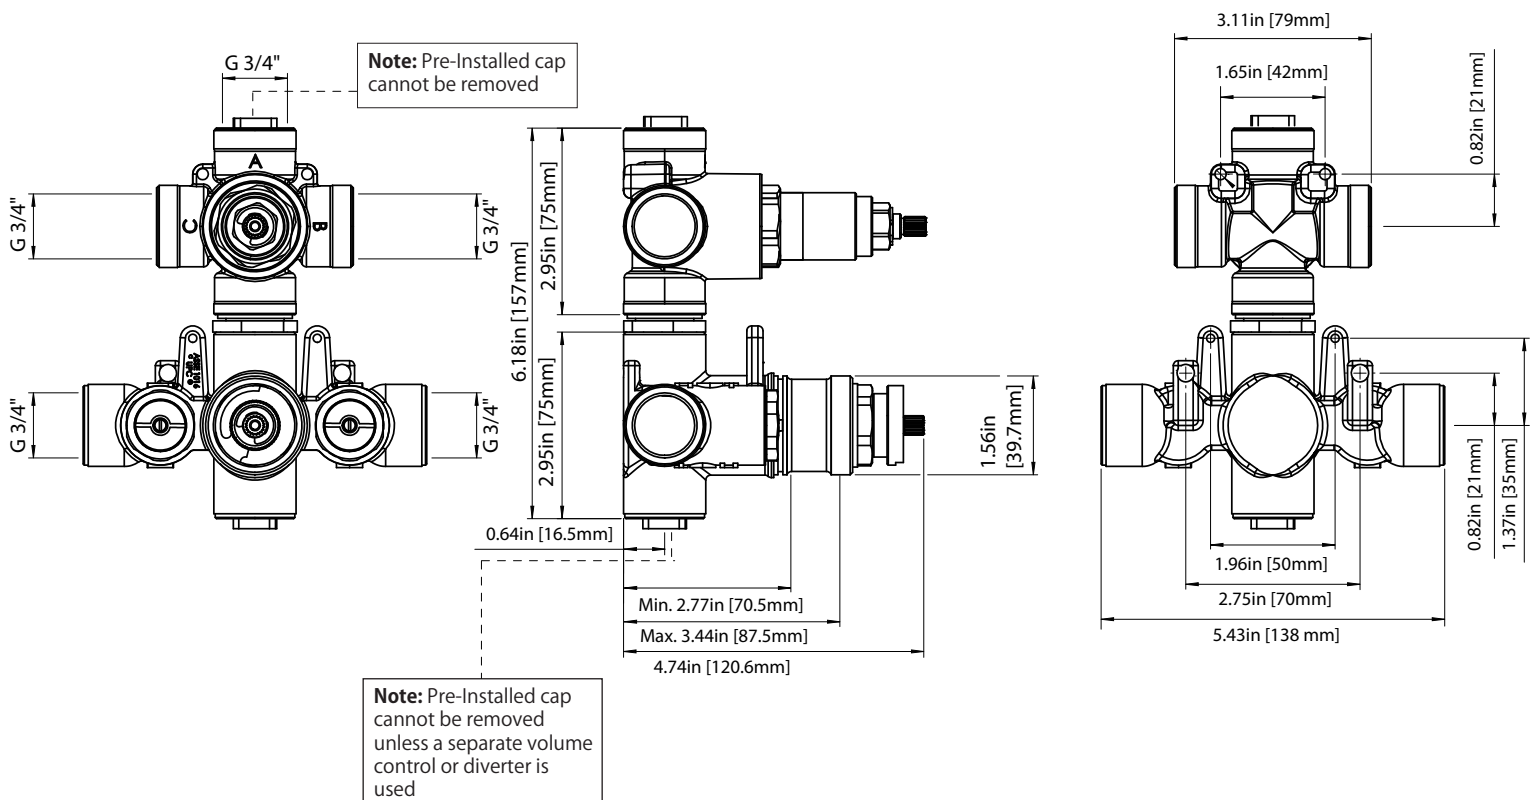


## JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

### TWO OUTPUT - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

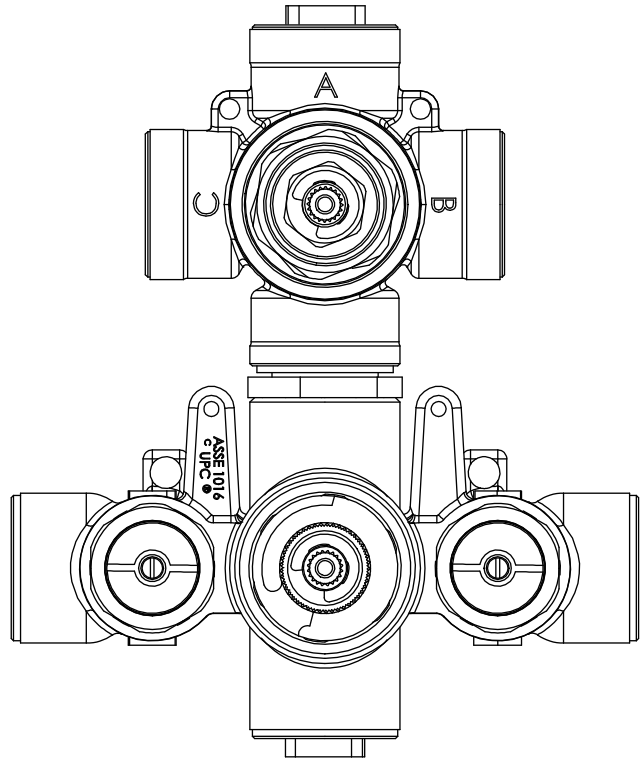


### TWO OUTPUT - SHARED PORT OPERATION

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated

### Water Diversion Diagram

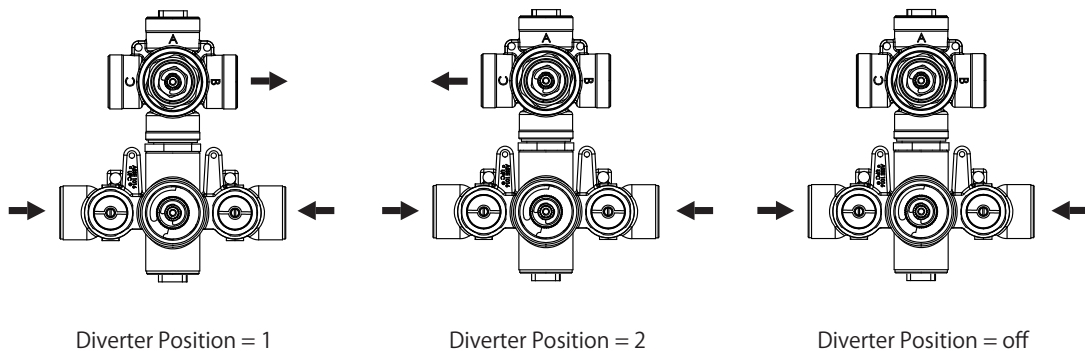


## HH1026H | Solid Brass Hand Shower




### SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate
- With back flow prevention check valve

### Technical Diagram

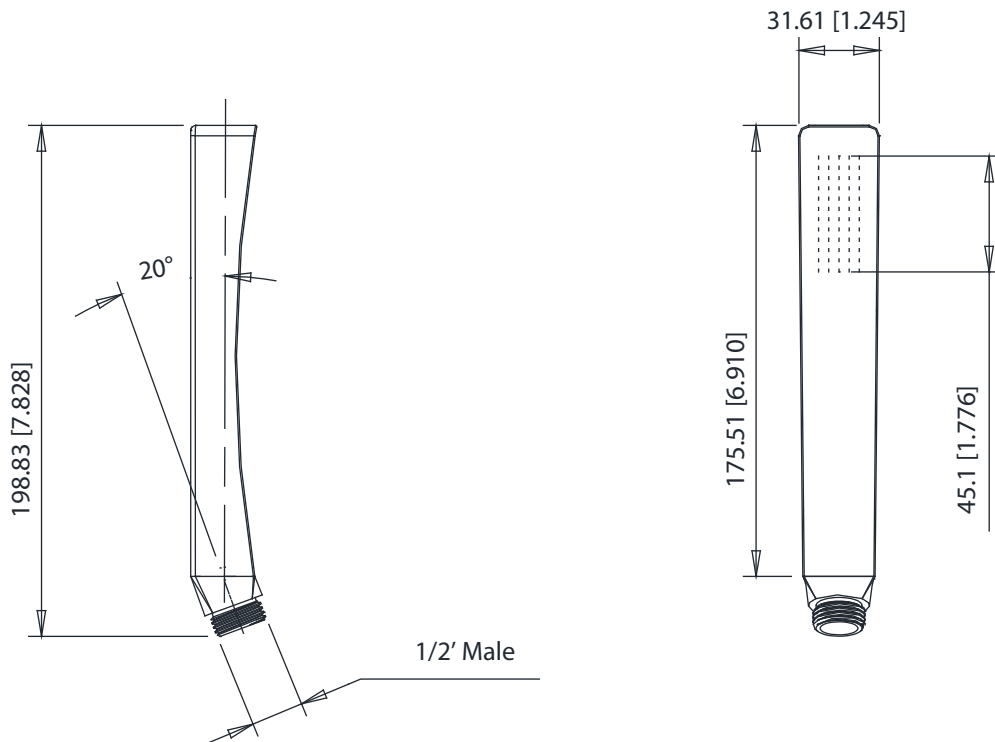


## SER.8006 | Wall Elbow Outlet for Hand Shower with Holder

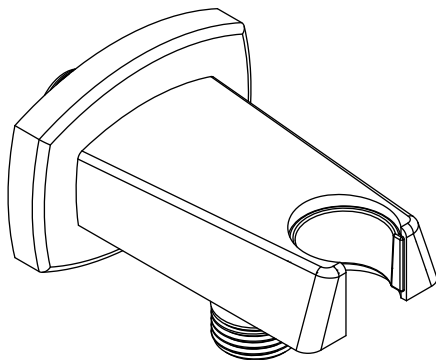

### SPECIFICATIONS:

- Solid Brass Construction
- Includes Check Valve with back flow prevention.

### Technical Diagram

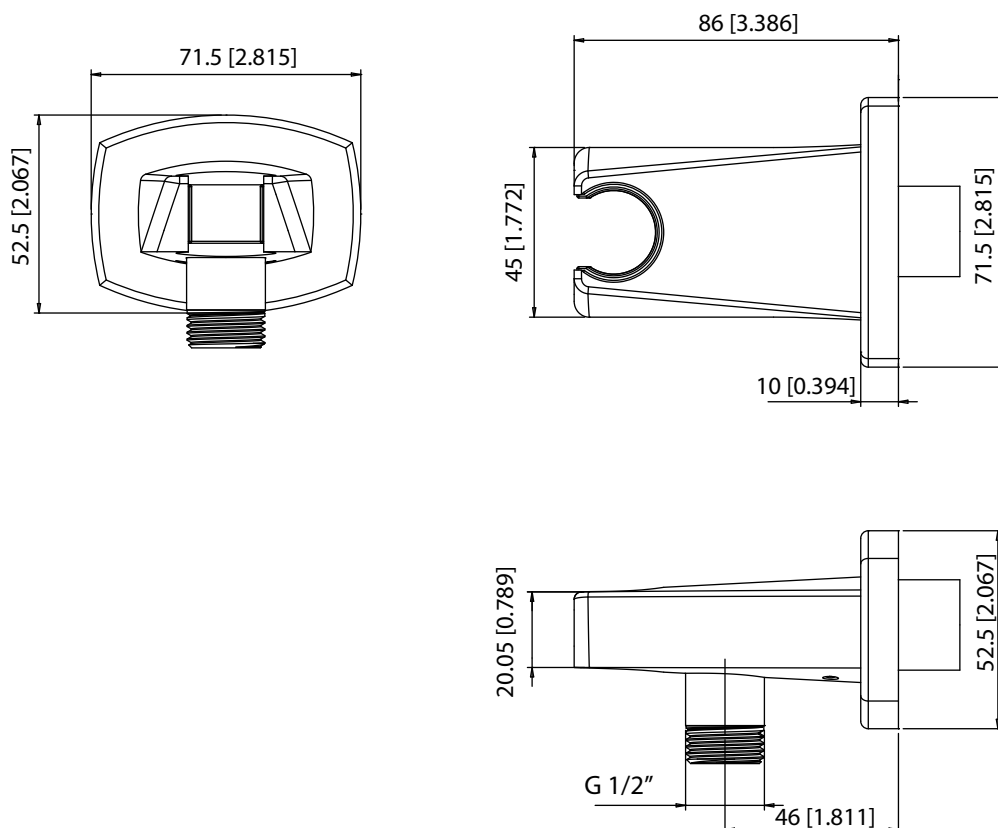

## HH.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

