


SPECIFICATIONS:

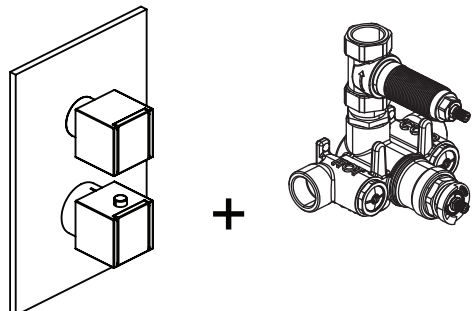

Valve
[JVH.4101]

- Turn bottom handle to control temperature
- Turn top handle to control volume
- Includes Thermostatic valve (JVH.4101) w/ service stops
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4101E**

Technical drawings of the 100 Series 3-Port Solenoid Valve, showing dimensions in inches [millimeters].

Top View:

- Overall Width: 5.51 in [140mm]
- Overall Height: 8.26 in [210mm]

Side View:

- Flange Thickness: 0.241 in [6mm]
- Coil Height: 3.14 in [79.75mm]
- Body Height: 1.65 in [42mm]


Front View:

- Coil Width: 1.96 in [49.78mm]
- Overall Width: 5.43 in [138mm]

Side View (Right):

- Overall Height: 5.96 in [151.3mm]
- Port Size: 4 - G-3/4"
- Port Thread: 8x20"
- Port Height: 1.06 in [26.9mm]
- Port Width: 3.14 in [79.75mm]
- Port Height (Bottom): 1.65 in [41.9mm]
- Port Width (Bottom): 4.76 in [120mm]
- Port Height (Bottom): 3.63 in [92.2mm]
- Port Width (Bottom): 3.44 in [87.5mm]
- Port Height (Bottom): 2.77 in [70.5mm]


JVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 1 of 2



SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 36 LPM @ 3 BAR
- Extension Available - JVH.4101E**

Technical Diagram

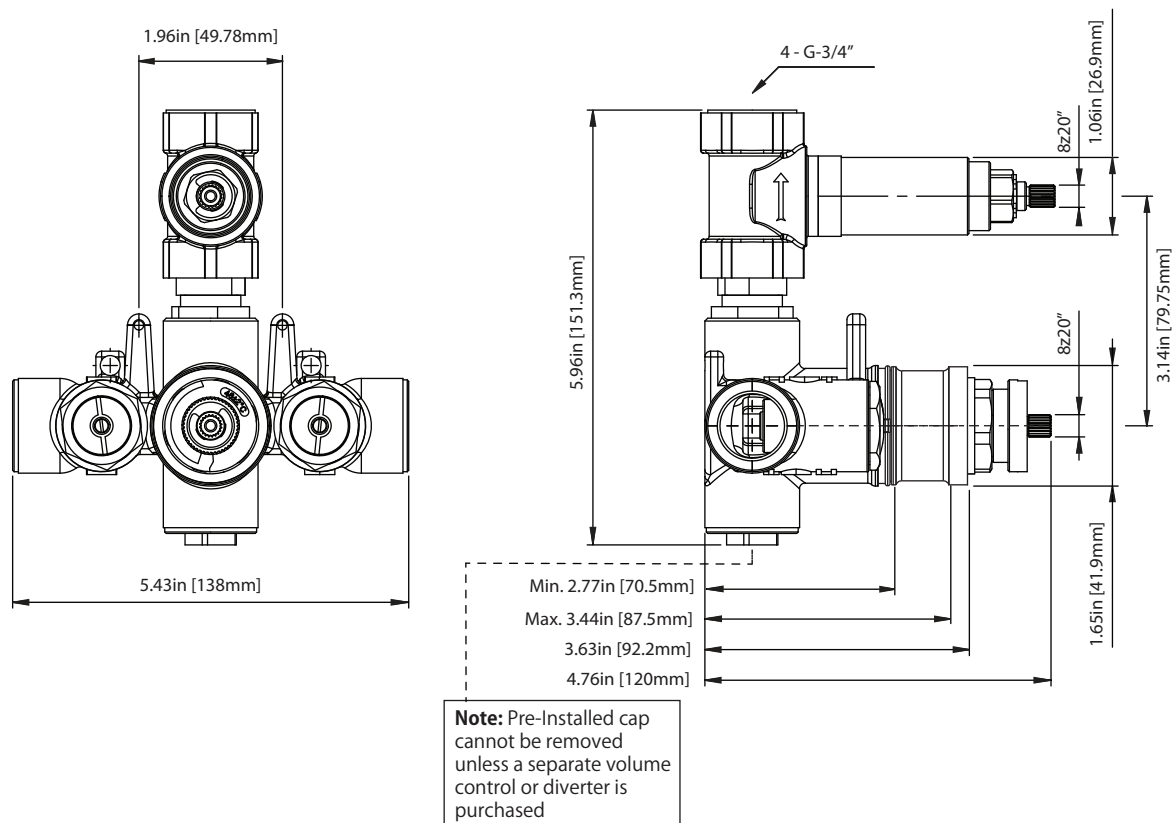

JVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 2 of 2

Water Flow Diagram

